

# Fuseholders 5 x 20 mm



- ▶ 5 x 20mm fuses
- ▶ Finger grip or screwdriver slot knob options.
- ▶ Hand release and screwdriver release
- ▶ PC2 protection category
- ▶ Solder & 2.8mm terminals
- ▶ Raised or low profile bezels
- ▶ Snap in or threaded bushing mounting options
- ▶ Snap fit or screw to panel fixing

**T 0332 RA ---**

TERMINAL BODY & CAP PANEL HOLE OPTIONS



6.3A 250Vac (max fuse rating\*) T-55 to T+70 (ambient)  
Maximum dissipation wattage: 1.5W



6.3A UL 94V2 UL file E92075 CSA file LR44770




RoHS compliant

These products comply with safety category PC2.

\*Users should be aware of the de-rating factors published by specialist manufacturers of fuses.

These fuseholders are fitted with combination (solder/2.8) mid-body terminals. It has not been possible to show both views here.



**M520**  
Terminal Cover




**A0033 00**  
In-line 5 x 20 fuseholder  
Extra low voltage 5A Max

▶ TERMINAL	▶ BODY AND CAP	▶ PANEL HOLE
<b>T</b>  Solder	<b>0332</b> Finger grip  	<b>RA</b> 
	<b>0333</b> Screwdriver release  	
<b>B</b> 	<b>0340</b> Screwdriver release  	<b>RD</b> 
	<b>0341</b> Screwdriver release  	


## DIMENSIONS (mm)

**0332** (T terminal shown)




Panel thickness 0.8-4.5mm

**0333** (T terminal shown)




Panel thickness 0.8-4.5mm

**0340** (T terminal shown)

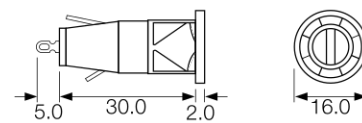

Panel thickness 0.8-2.0mm

**0341** (T terminal shown)

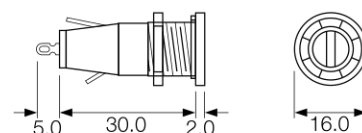

Panel thickness 0.8-4.5mm

# Fuseholders 6.3 x 32mm (1 1/4" x 1/4")



16A 250Vac (max fuse rating\*) T-55 to T+70 (ambient)  
Maximum dissipation wattage: 4W



16A UL 94V2 UL file E92075 CSA file LR44770



RoHS compliant

These products comply with safety category PC2.

\*Users should be aware of the de-rating factors published by specialist manufacturers of fuses.

Fuseholders with in-line termination have combination (4.8/6.3) terminals. It has not been possible to show both views here. Units with right angle terminals have user specified end terminals and combination mid-body terminals.

- ▶ 6.3 x 32mm fuses
- ▶ Screwdriver slot knob
- ▶ PC2 protection category
- ▶ 4.8, 6.3 and solder terminals
- ▶ Low profile bezel
- ▶ Snap in or threaded bushing mounting options




**M873**

Cover for C & T terminals



**A0035 00**

In-line 6.3 x 32 (1 1/4 x 1/4) fuseholder  
Extra low voltage 5A Max



▶ TERMINAL	▶ BODY AND CAP	▶ PANEL HOLE	DIMENSIONS (mm)
<b>C</b> <p>6.3 x 0.8</p>	<b>0345</b> (C terminal shown) Screwdriver release  	<b>RA</b> <p>Panel thickness 0.8 - 2.0mm for snap fit 0.8 - 7.0mm for screw to panel fixing</p>	<b>0345</b> (C terminal shown) 
<b>D</b> <p>6.3 x 0.8 Right angle</p>	<b>0345</b> (D terminal shown) Screwdriver release  	<b>RD</b> <p>Panel thickness 0.8 - 2.0mm for snap fit 0.8 - 7.0mm for screw to panel fixing</p>	<b>0345</b> (D terminal shown) 
<b>T</b> <p>4.8 x 0.8 Solder</p>	<b>0347</b> (T terminal shown) Screwdriver release  	<b>RD</b> <p>Panel thickness 0.8 - 2.0mm for snap fit 0.8 - 7.0mm for screw to panel fixing</p>	<b>0347</b> (C terminal shown) 
<b>U</b> <p>4.8 x 0.8 Right angle solder</p>	<b>0347</b> (U terminal shown) Screwdriver release  		<b>0347</b> (D terminal shown) 

Optional metal fixing nut available for 0347