

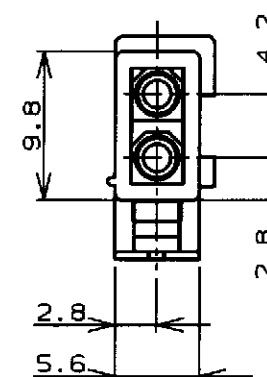
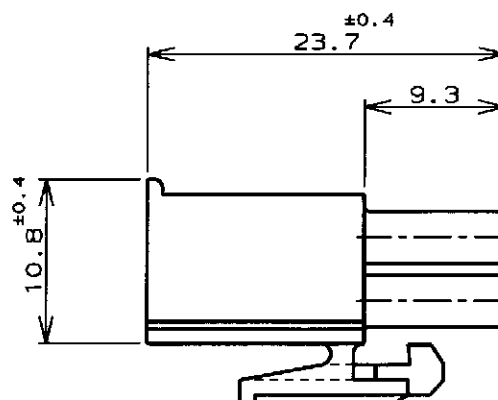


P	LTR	DESCRIPTION	ECN	DATE	DWN	APVD
	D	再作成 (REDRAWN)	FJ00-0871-98	8 Jun 98	ny	MS

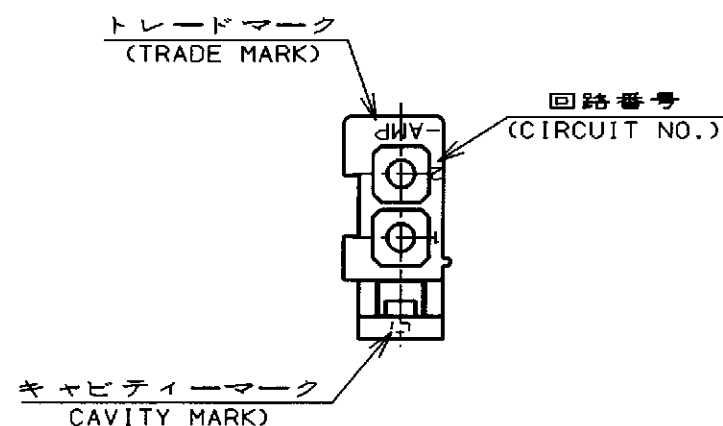

注記;


1. 使用端子型番は170359, 170360, 170361, 170362
2. 嵌合相手ハウジング型番は172157

NOTE;

1. APPLICABLE CONT P/N: 170359, 170360, 170361, 170362
2. MATING HSG P/N: 172157

THIS DRAWING IS A CONTROLLED DOCUMENT FOR AMP INCORPORATED.
IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING
ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.

DIMENSIONS:
単位: 寸
mm



MATERIAL
材料
66ナイロン UL94V-0
(66NYLON UL94V-0)

TOLERANCES UNLESS
OTHERWISE SPECIFIED

一般公差
(GENERAL TOLERANCE)

±0.3

FINISH
仕上

—

CHK M. Yamasaki 8 Jun 98

APVD M. Yamasaki 15 Jun 98

PRODUCT SPEC

製品規格

108-5138

INSTRUCTION SHEET

取扱い説明書

IS-105J

WEIGHT

—

CUSTOMER DRAWING

黒 (BLACK)	1-172165-9
青 (BLUE)	1- -6
緑 (GREEN)	1- -5
赤 (RED)	1- -2
自然色 (NATURAL)	172165-1
色 (COLOR)	型番 (P/N)
WIRE RANGE 包合電線断面積	INSULATION DIA 被覆外径

AMP		日本エー・エム・ピー株式会社 Kawasaki, Japan	
NAME 名称			
2極ミニユニバーサルメイトンロックプラグハウジング (UL94V-0)			
2Pos MINI UNIVERSAL MATE-N-LOCK CONN. PLUG HOUSING (UL94V-0)			
SIZE	CAGE CODE	DRAWING NO 番号	RESTRICTED TO
A3	00779	C=172165	
SCALE 尺度		SHEET 1	OF 1

参考図面