

SANYO**AM Tuner for Car Radio****Overview**


The LA1130 is an IC developed for AM tuner systems in car radio applications. It provides low-level local oscillation so that it can be applied in varactor diode tuning applications as well as μ tuning applications.

Functions


- RF amplification
- MIX
- OSC (with ALC)
- IF amplification
- Detection
- AGC (normal)
- RF wide-band AGC
- Others

Features

- Good space factor due to single-end package.
- Easy to design printed circuit pattern due to 3mm-pitch pin interval.
- Double-balanced type MIX : Improvement in IF interference, spurious interference.
- Normal AGC : Less variation in detector output to input.
- RF wide-band AGC : Improvement in cross modulation distortion, especially strong input characteristics in varactor diode tuning applications because of low operating level (300mVrms).
- AGC drive output for FET : Possible to apply AGC to FET at input stage in varactor diode tuning applications.
- ALC at OSC stage : Improvement in tracking error due to stabilized low-level (350mVrms) oscillation output in varactor diode tuning applications.
- Reference voltage output : Possible to use 5.6V reference voltage for other bias (FET, etc.).
- VCC variation compensation : Less variation in gain, distortion, etc. (7.5 to 16V)
- Less ripple voltage : Less modulation of carrier by supply voltage ripple.
- Low pop noise : Possible to reduce pop noise at the time of VCC-on, mode-on by selecting AGC time constant.

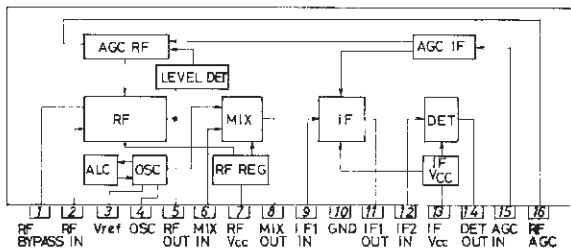Equivalent Circuit Block Diagram**Package Dimensions**

unit: mm

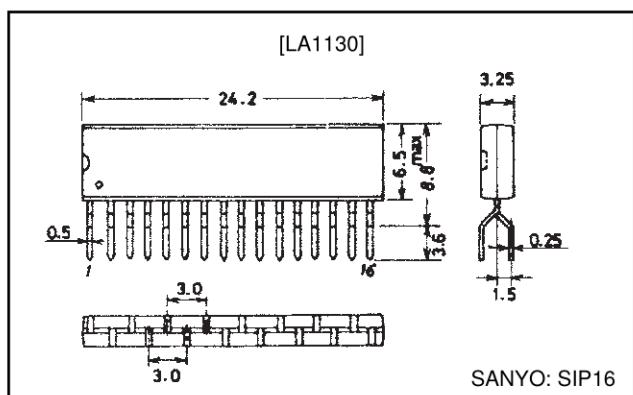3020A-SIP16**SANYO Electric Co.,Ltd. Semiconductor Business Headquarters**

TOKYO OFFICE Tokyo Bldg., 1-10, 1 Chome, Ueno, Taito-ku, TOKYO, 110 JAPAN

Specifications**Maximum Ratings** at Ta=25°C, See specified Test Circuit.

| Parameter | Symbol | Conditions | Ratings | Unit |
|-----------------------------|---------------------|------------------------------------------|-------------|------|
| Maximum supply voltage | V _{CC} max | Pins 7, 13 | 16 | V |
| Maximum output voltage | V _{O5} | Pin 5 | 17 | V |
| | V _{O8, 11} | Pins 8, 11 | 24 | V |
| Maximum input voltage | V _{IN} max | Pin 2 | 5.6 | V |
| Maximum supply current | I _{CC} max | Total of current at pins 5, 7, 8, 11, 13 | 35 | mA |
| Maximum flow-out current | I ₃ | Pin 3 | 6 | mA |
| Allowable power dissipation | P _d max | Ta≤45°C | 520 | mW |
| Operating temperature | T _{opr} | | -20 to +70 | °C |
| Storage temperature | T _{stg} | | -40 to +125 | °C |


Recommended Operating Condition at Ta=25°C





| Parameter | Symbol | Conditions | Ratings | Unit |
|----------------------------|-----------------|------------|-------------|------|
| Recommended supply voltage | V _{CC} | | 7.5 to 14.0 | V |


Operating Characteristics at Ta=25°C, V_{CC}=8V, f_r=1MHz, f_m=400Hz, See specified Test Circuit.

| Parameter | Symbol | Conditions | Ratings | | | Unit |
|-----------------------------------|-----------------------|---------------------------------------------------------------------------|---------|-------|-------|-------|
| | | | min | typ | max | |
| Current drain | I _{CC1} | Quiescent | 12.5 | 18.0 | 24.5 | mA |
| | I _{CC2} | 120dB μ input | 14.0 | 20.0 | 26.5 | mA |
| Detection output | V _{O1} | 24dB μ input, 30% mod. | -31.0 | -26.5 | -12.0 | dBm |
| | V _{O2} | 74dB μ input, 30% mod. | -18.0 | -15.5 | -12.0 | dBm |
| Signal to noise ratio | S/N 1 | 24dB μ input, 30% mod. | 16 | 20 | | dB |
| | S/N 2 | 74dB μ input, 30% mod. | 46 | 50 | | dB |
| Total harmonic distortion | THD1 | 74dB μ input, 30% mod. | | 0.35 | 1.0 | % |
| | THD2 | 74dB μ input, 80% mod. | | 0.35 | 1.5 | % |
| | THD3 | 120dB μ input, 30% mod. | | 0.35 | 2.0 | % |
| RF AGC voltage (V ₁₆) | V _{RFAGC1} | Quiescent | 5.2 | 5.6 | 5.9 | V |
| [Reference characteristics] | | | | | | |
| Signal to noise ratio | S/N 3 | 35dB μ input, 30% mod. | | 31 | | dB |
| Total harmonic distortion | THD4 | 128dB μ input, 80% mod. | | 0.58 | | % |
| Detection output variation | ΔV _O | V _O (128dB μ)/V _O (74dB μ) | | 0.4 | | dB |
| Bandwidth (6dB) | BW ₆ | 6dB width, 15dB μ input 30% mod. | | 7 | | kHz |
| (60dB) | BW ₆₀ | 60dB width, 15dB μ input 30% mod. | | 30 | | kHz |
| Selectivity (1 signal) | ACA | ±10kHz detuning, 15dB μ input, 30% mod. | | 40 | | dB |
| Ripple rejection ratio | | 100dB μ input, IF V _{CC} (pin 13) ripple level 50Hz to 15dBm | | 40.5 | | dB |
| Local oscillation voltage | V _{osc} | | | 350 | | mVrms |
| Local osc drift | ΔV _{osc} | V _{oscL} (515kHz) to V _{oscH} (1660kHz) | | 20 | | mVrms |
| Whistle | 2f _r Tweet | 74dB μ input, 400Hz beat max. | | -33 | | dB |
| RF AGC voltage (V ₁₆) | V _{RFAGC2} | 120dB μ input | | 1 | | V |
| RF output voltage | V _{ORF} | 100dB μ input, ±10kHz | | 300 | | mVrms |
| IF interference | | f _r =600kHz, 15dB μ input | | 91.5 | | dB |
| Image frequency interference | | f _r =1400kHz, 15dB μ input | | 70.5 | | dB |

Sample Application Circuit (excluding the area bounded by the dotted line) / also used as characteristics test circuit.

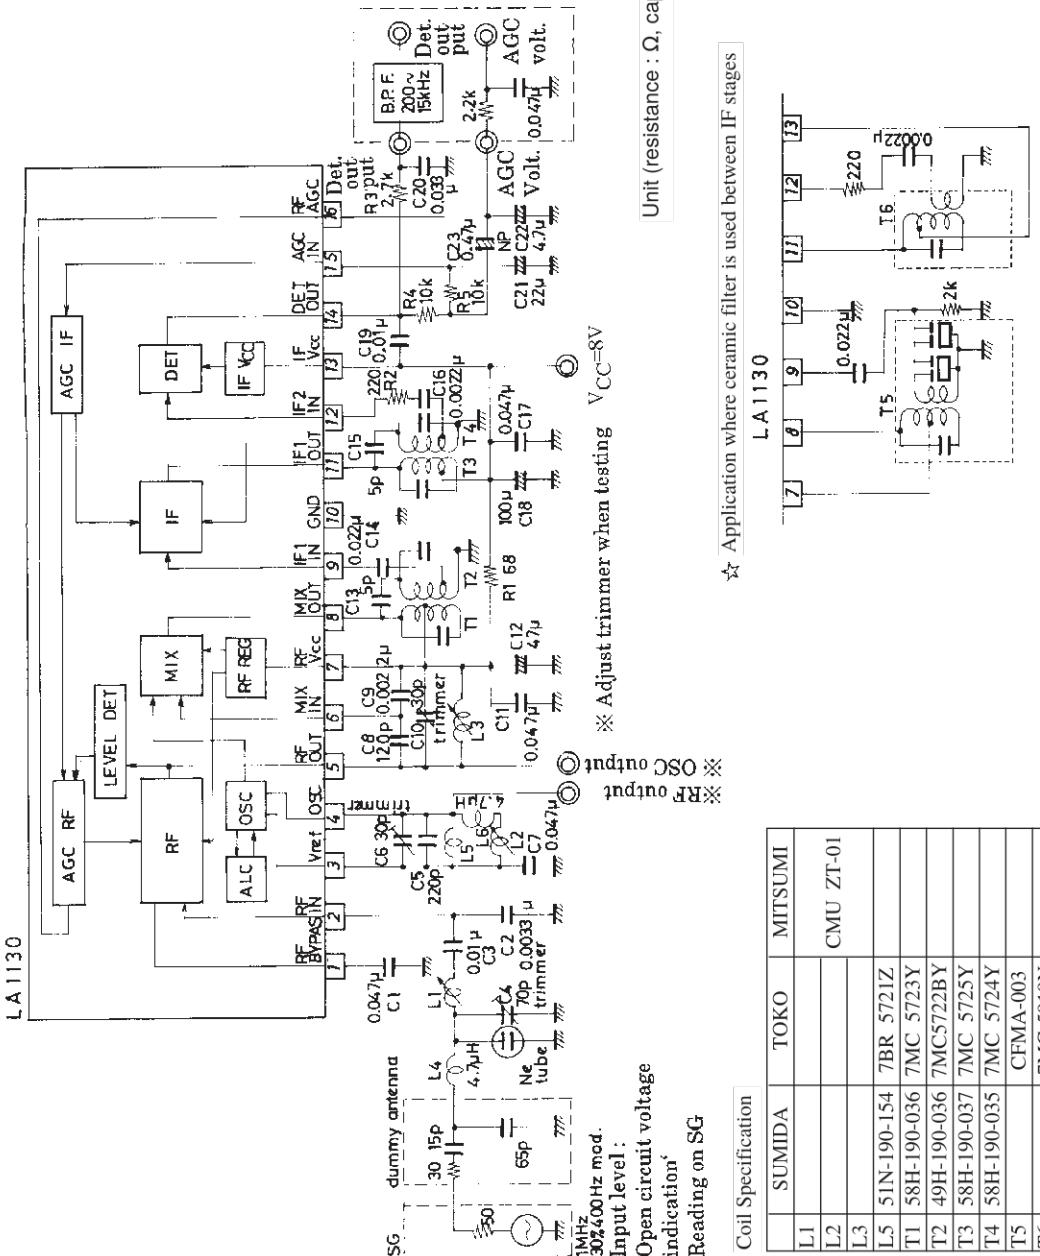

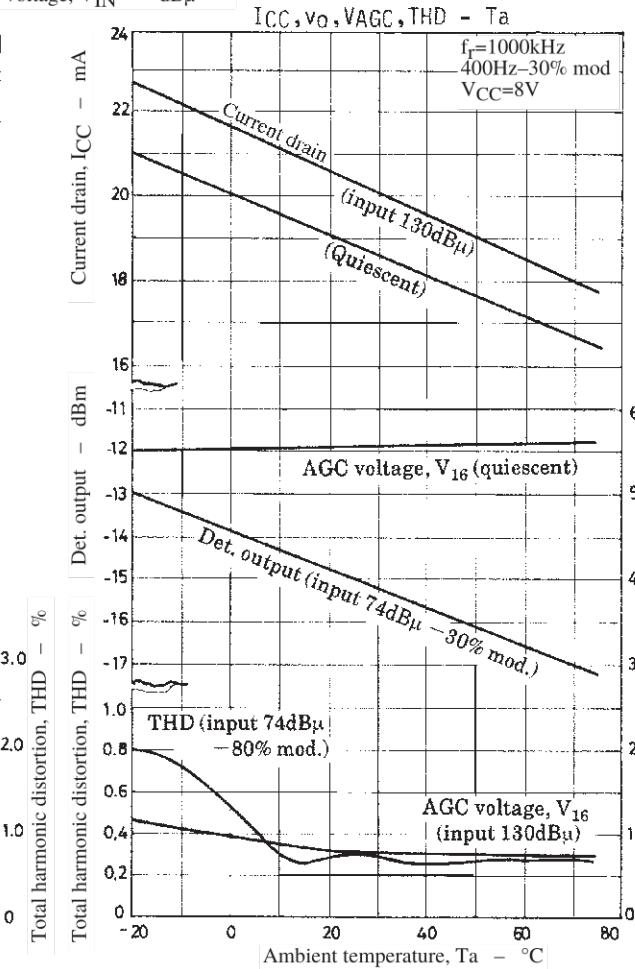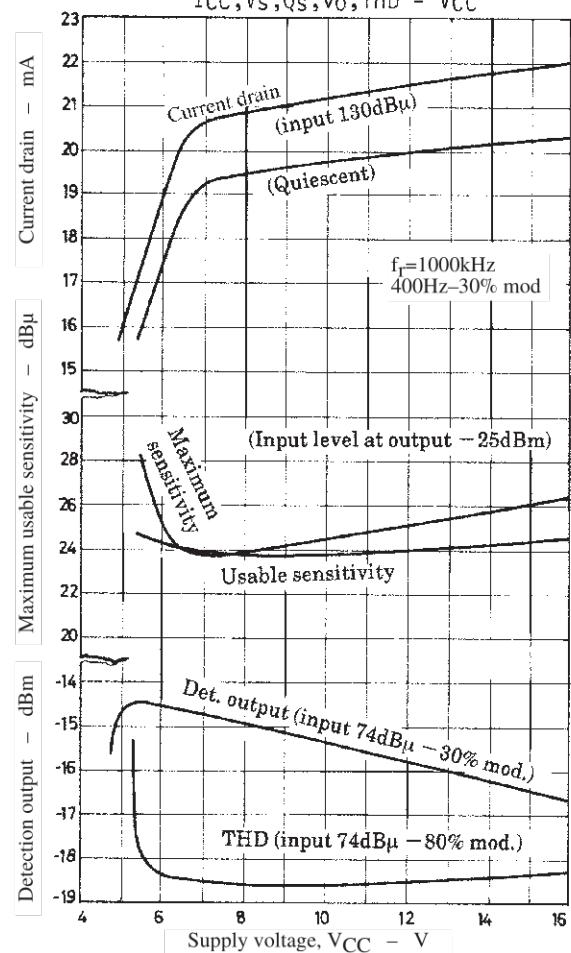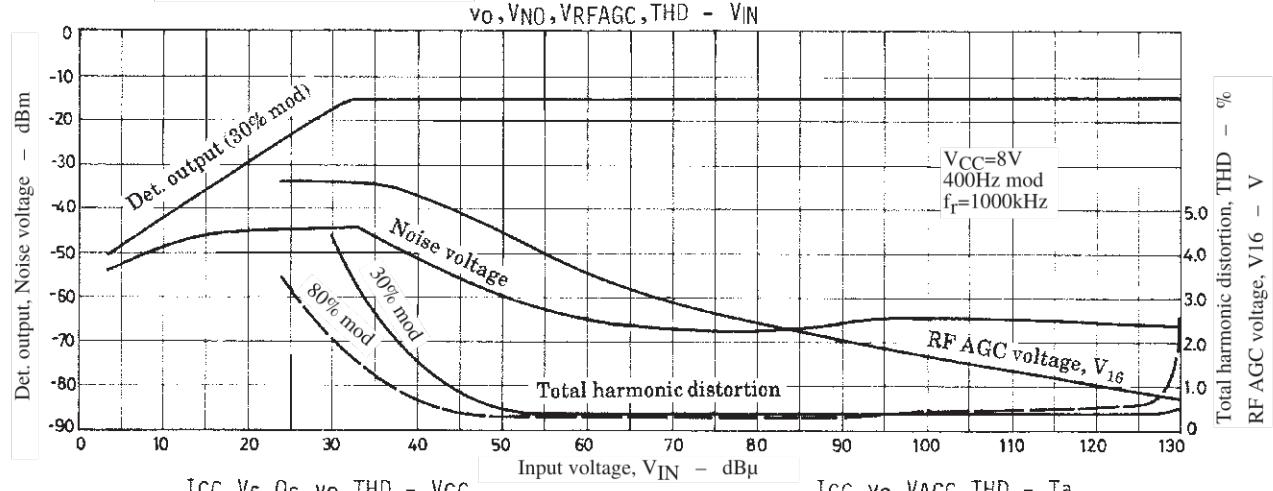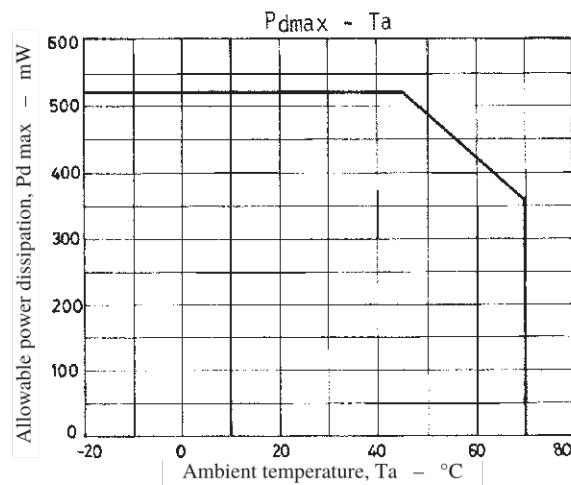

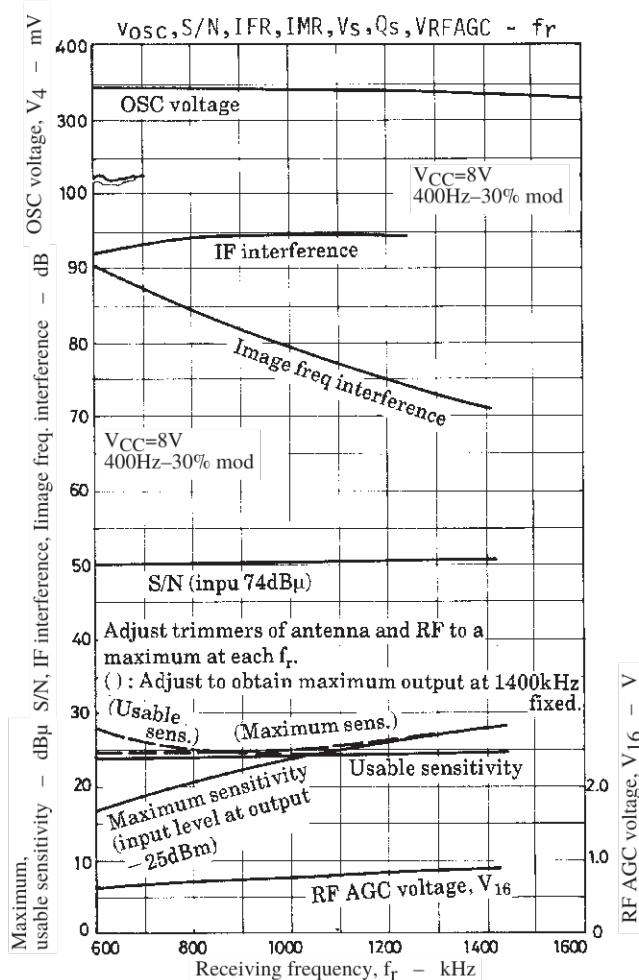

- No products described or contained herein are intended for use in surgical implants, life-support systems, aerospace equipment, nuclear power control systems, vehicles, disaster/crime-prevention equipment and the like, the failure of which may directly or indirectly cause injury, death or property loss.
- Anyone purchasing any products described or contained herein for an above-mentioned use shall:
 - ① Accept full responsibility and indemnify and defend SANYO ELECTRIC CO., LTD., its affiliates, subsidiaries and distributors and all their officers and employees, jointly and severally, against any and all claims and litigation and all damages, cost and expenses associated with such use;
 - ② Not impose any responsibility for any fault or negligence which may be cited in any such claim or litigation on SANYO ELECTRIC CO., LTD., its affiliates, subsidiaries and distributors or any of their officers and employees jointly or severally.
- Information (including circuit diagrams and circuit parameters) herein is for example only; it is not guaranteed for volume production. SANYO believes information herein is accurate and reliable, but no guarantees are made or implied regarding its use or any infringements of intellectual property rights or other rights of third parties.

This catalog provides information as of September, 1997. Specifications and information herein are subject to change without notice.