

PIEZO BUZZER

Customer	
Customer No.	
BeStar Model Name	BPT3012XH19.5
Product No.	041200
Issue No.	BS/TEP01.127A
Issue Date	01/04/08

Approval:

- 1.Characteristic
- 2.Dimension
- 3.Reliability Test



BESTAR ELECTRONICS INDUSTRY CO., LTD

TianAn Industry Park 4/F, Site B ChangZhou New District

Tel: 86-519-5103228

Fax: 86-519-5131010

Http: www.be-star.com

E-Mail: bestarco@pub.cz.jsinfo.net

BPT3012XH19.5


1. Characteristic

★Electrical and Mechanical Characteristics



No.	Item	Specifications
1.	Rated Voltage	12VDC
2.	Operating Voltage	3...20VDC
3.	a)Rated Current	max.10mA
4.	a)Sound Pressure Level at 30cm	min.90dB
5.	a)Resonant Frequency	3600 $\pm$ 500Hz
6.	Operating Temperature	-20 ...+75
7.	Storage Temperature	-30 ...+85
a)Value applying at rated voltage(DC)		

★Standard Output Measurement Setup

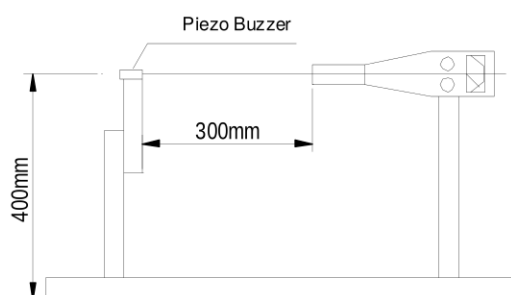

DIS.		DATE		Page:1 of 3	BPT3012XH19.5
CHEC.		DATE		3rd angle projection	Piezo Buzzer
APPR.		DATE			DRG NO BS/TEP01.127A



BESTAR ELECTRONICS INDUSTRY CO.,LTD


TianAn Industry Park 4/F,Site B ChangZhou New District
E-Mail:bestarco@ pub.cz.jsinfo.net Http:www.be-star.com

BPT3012XH19.5

2. Dimension

Tolerance: ± 0.5

Unit:mm

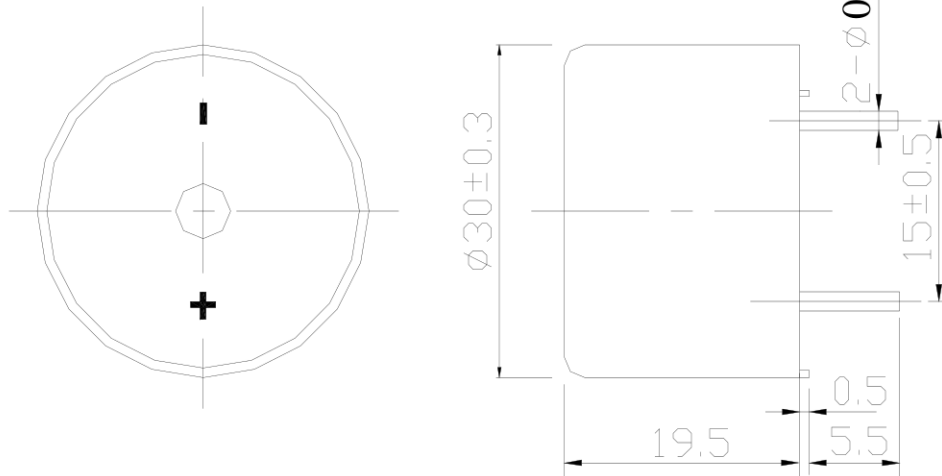

This print and information there in are proprietary to Bestar Electronics Industry Co., Ltd. and shall not be used in whole or in part without its written content No041200

DIS.		DATE		Page:2 of 3	BPT3012XH19.5
CHEC.		DATE		3rd angle projection	Piezo Buzzer
APPR.		DATE			DRG NO BS/TEP01.127A
BESTAR ELECTRONICS INDUSTRY CO.,LTD TianAn Industry Park 4/F,Site B ChangZhou New District E-Mail:bestarco@ pub.cz.jsinfo.net Http:www.be-star.com					



BPT3012XH19.5

3. Reliability test

3.1 high temperature test

Temperature +80° C
Duration 96hrs

3.2 low temperature test

Temperature -30° C
Duration 96hrs

3.3 life test in normal temperature

Power supply rated voltage
Duration 1000hrs

3.4 temperature cycle test

Cycles 5



3.5 Humidity cycle test

Cycles 5



all these tests above should be measured after leaving normal temperature for 2hrs.

3.6 Solderability

Temperature 245± 5° C
Duration 3± 0.5sec

3.7 Drop test

Height 70cm
(to 10mm thickness woodenboard)
Direction 3

Notice: After the test the part shall meet specifications without any degrance and performance except S.P.L, S.P.L shall be 85dB more .

DIS.		DATE		Page:3 of 3	BPT3012XH19.5
CHEC.		DATE		3rd angle projection	Piezo Buzzer
APPR.		DATE			DRG NO BS/TEP01.127A



BESTAR ELECTRONICS INDUSTRY CO.,LTD

TianAn Industry Park 4/F,Site B ChangZhou New District

E-Mail:bestarco@ pub.cz.jsinfo.net Http:www.be-star.com