


P.C.B LAYOUT

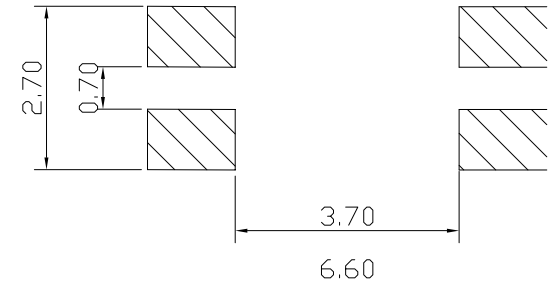

Rating	DC12V 50mA
Contact Resistance	500mΩMax.
Insulation Resistance	>100MΩDC100V
Withstand Voltage	AC250V 1min.
Soldering Temper.	230°C Max.
Electrical Life	100,000 cycles
Ambient Temper. Used	-20°C to 70°C
Ambient Humidity Used	<85% RH
Operating Force	160 ⁺⁷⁰ ₋₄₀ gf
Travel	0.3 ^{+0.1} _{-0.2} mm