


# Solid State Relays

## Datasheet WG A5 6D

Comus International Bvba  
 Overhaamlaan 40  
 3700 Tongeren, Belgium  
 Phone: +32 12390400  
 Fax: +32 12235754  
 Email: info@comus.be  
 www.comus.be

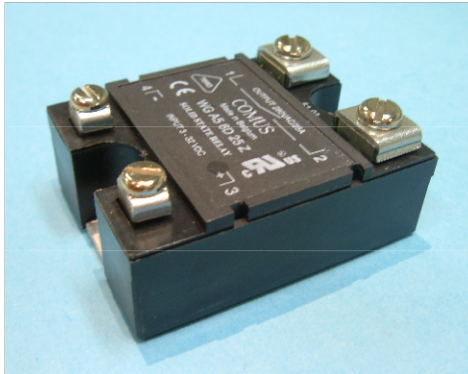

### Features

- Switching** Zero cross and random
- Output** Triac with internal snubber
- Input** DC with constant current control
- Applications** resistive and inductive loads with  $\cos\phi > 0,85$  (Z-Type)  
inductive load with  $\cos\phi > 0,65$  (R-Type)

### Technical data

WG A5 6D...	10 Z	10 R	25 Z	25 R	40 Z	40 R
<b>Input circuit</b>						
Control voltage range	3...32 VDC					
Control current max.	10 mA					
Turn-off voltage min.	1 VDC					
Input resistance	Constant current					
<b>Output circuit</b>						
Load voltage range	24...280 VAC					
Peak-off-state voltage	600 V <sub>drm</sub>					
Off-state leakage current	6 mA eff.		12 mA eff.			
Load current range	0,1...10 A		0,1...25 A		0,2...40 A	
Surge current 1 half wave	110 A <sub>peak</sub>		230 A <sub>peak</sub>		400 A <sub>peak</sub>	
I <sup>2</sup> t for fusing	60 A <sup>2</sup> s		260 A <sup>2</sup> s		880 A <sup>2</sup> s	
On-state voltage	1,85 V <sub>peak</sub>					
Off-state (static) dv/dt	500 V/μs					
Snubber	47 Ω / 47 nF		47 Ω / 100 nF			
<b>General data</b>						
Turn-on time max.	11 ms	0,1 ms	11 ms	0,1 ms	11 ms	0,1 ms
Turn-off time max.	11 ms					
Line frequency range	47...63 Hz					
Isolation volt. between input/output	4.000 V					
Isolation volt. between input-output/base	2.500 V					
Isolation resistance	50 MΩ					
Operation temperature	-20...+80 °C					
Recommended varistor	SIOV-S20 K230					



# Solid State Relays

## Datasheet WG A5 6D

Comus International Bvba  
 Overhaamlaan 40  
 3700 Tongeren, Belgium  
 Phone: +32 12390400  
 Fax: +32 12235754  
 Email: info@comus.be  
 www.comus.be



### Dimensions in mm

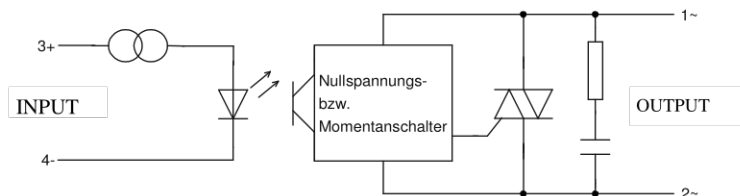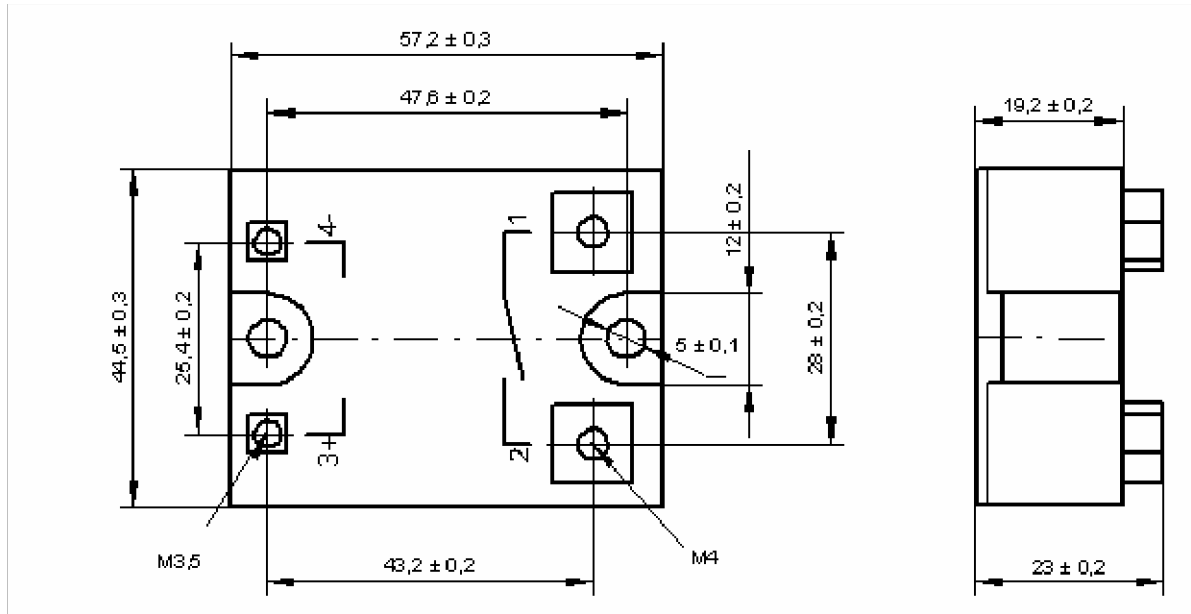

### Ordering Information

WG A5 6D 10 Z


CURRENT  
 10 : 10A  
 25 : 25A  
 40 : 40A

SWITCHING  
 R : Random  
 Z : Zero cross

Options: Suffix - **P**, 100% potted




### Derating diagrams

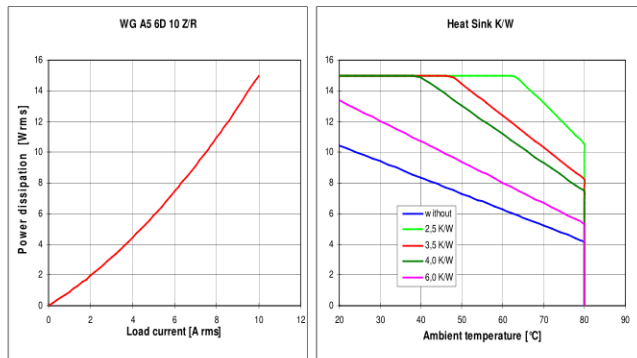


Heat sink	Number of SSR per Heatsink/ Load current per SSR		
	1 SSR	2 SSR	3 SSR
WG K1/100	10 A	8 A	
WG K2/100	10 A	10 A	
WG K3/160	10 A	10 A	10 A
WG K4/160L	10 A	10 A	10 A
WG K5/80	10 A		

Values for 40°C enclosure-temperature and mounted with conducting paste between the SSR and the heat sink

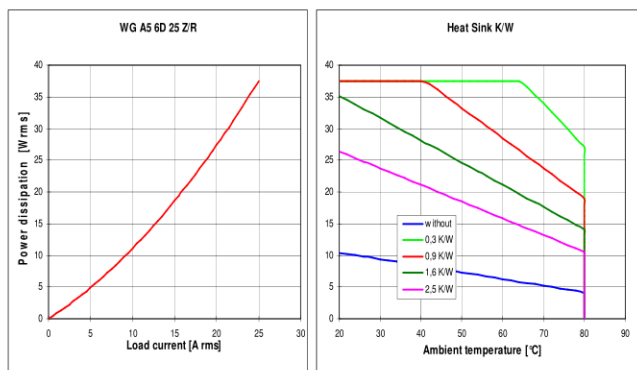

Heat sink	Number of SSR per Heatsink/ Load current per SSR		
	1 SSR	2 SSR	3 SSR
WG K1/100	14 A	10 A	
WG K2/100	17 A	14 A	
WG K3/160	25 A	21 A	18 A
WG K4/160L	25 A	25 A	25 A
WG K5/80	24 A		

Values for 40°C enclosure-temperature and mounted with conducting paste between the SSR and the heat sink

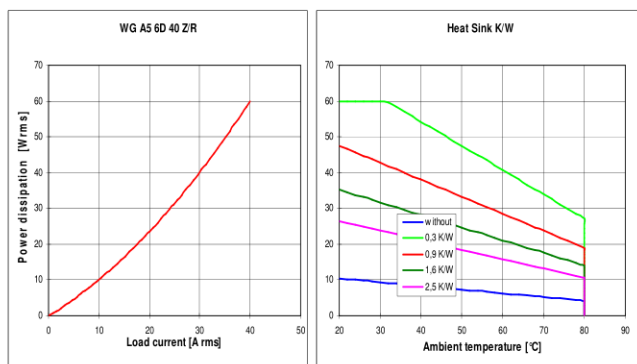

Heat sink	Number of SSR per Heatsink/ Load current per SSR		
	1 SSR	2 SSR	3 SSR
WG K1/100	16 A	11 A	
WG K2/100	20 A	15 A	
WG K3/160	31 A	24 A	20 A
WG K4/160L	40 A	36 A	32 A
WG K5/80	27 A		

Values for 40°C enclosure-temperature and mounted with conducting paste between the SSR and the heat sink