






REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	HP 22/06/05		



Housing with contact

Upper shell

NOTES:




1. SPECIFICATIONS

- . Contact Resistance: 50mΩ max
- . Insulator Resistance: 100MΩ min.
- . Current Rating: 1.5A per pin max.
- . Rated Voltage: 30V DC
- . Dielectric withstanding voltage: AC 100V For 1 minute
- . Contact: Copper Alloy
- . Housing: Thermoplastic(UL 94V-0)

2. PRODUCT NUMBER CODE:

DS1106 - X X X

- Contact plating
 - 0: Selective gold flash
 - C: Selective 3u" gold
- Shell plating
 - N: Nickel
 - 6: Tin
- Color of housing
 - B: Black

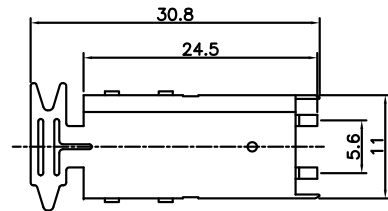

Down shell