

CH8x32 gG 10A/400V



Specifications

ETI Code	002610007
Description	CH8x32 gG 10A/400V
Weight	4.25
Level	Cilindrical fuse links gG
Rated current (A)	10
Type	CH
Size	CH8
Characteristics	gG
Rated AC voltage (V)	400
Dimensions	8X31
Breaking capacity AC (kA)	50
Standards	IEC 60269-1, IEC 60269-2
Application	For cable protection
Application	For cable protection
Dimensions	8X31
Breaking capacity AC (kA)	50
Standards	IEC 60269-1, IEC 60269-2

Online product page [🔗](#)

Other documentation



Technical data catalogue

3D Model


EU declaration




ETIM international clasification

Nominal current	10A
Application	For cable protection
Size	Other
Nominal rated current	10
Construction size	CH8
Utilization category	Other
Breaking capacity	50kA
Max. rated operation voltage Ue AC	400
Rated voltage	AC 400 V
With striker	


Cut-off current characteristics

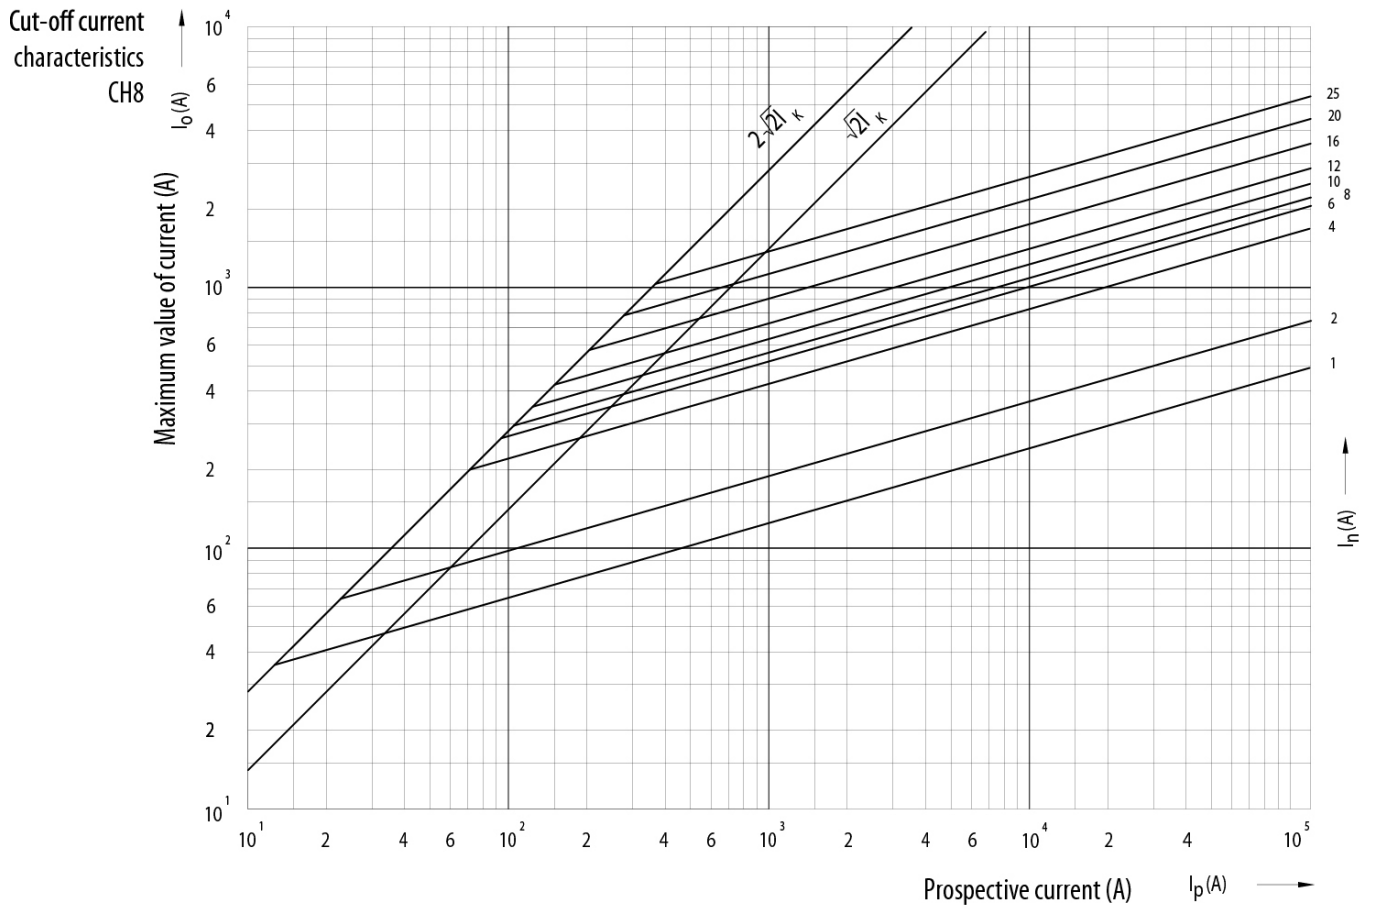


Melting energy characteristics

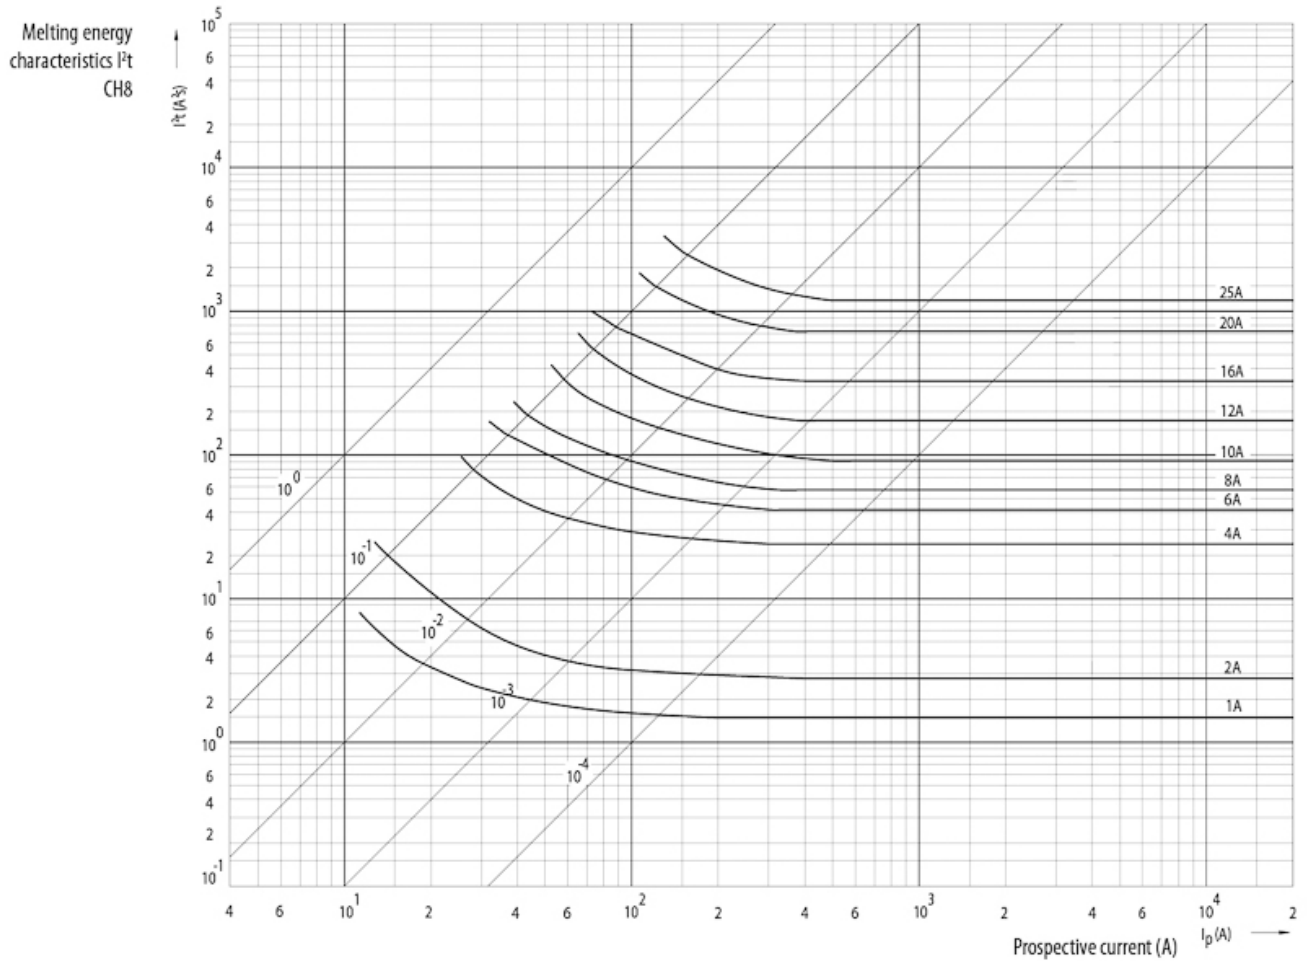

Time current characteristics

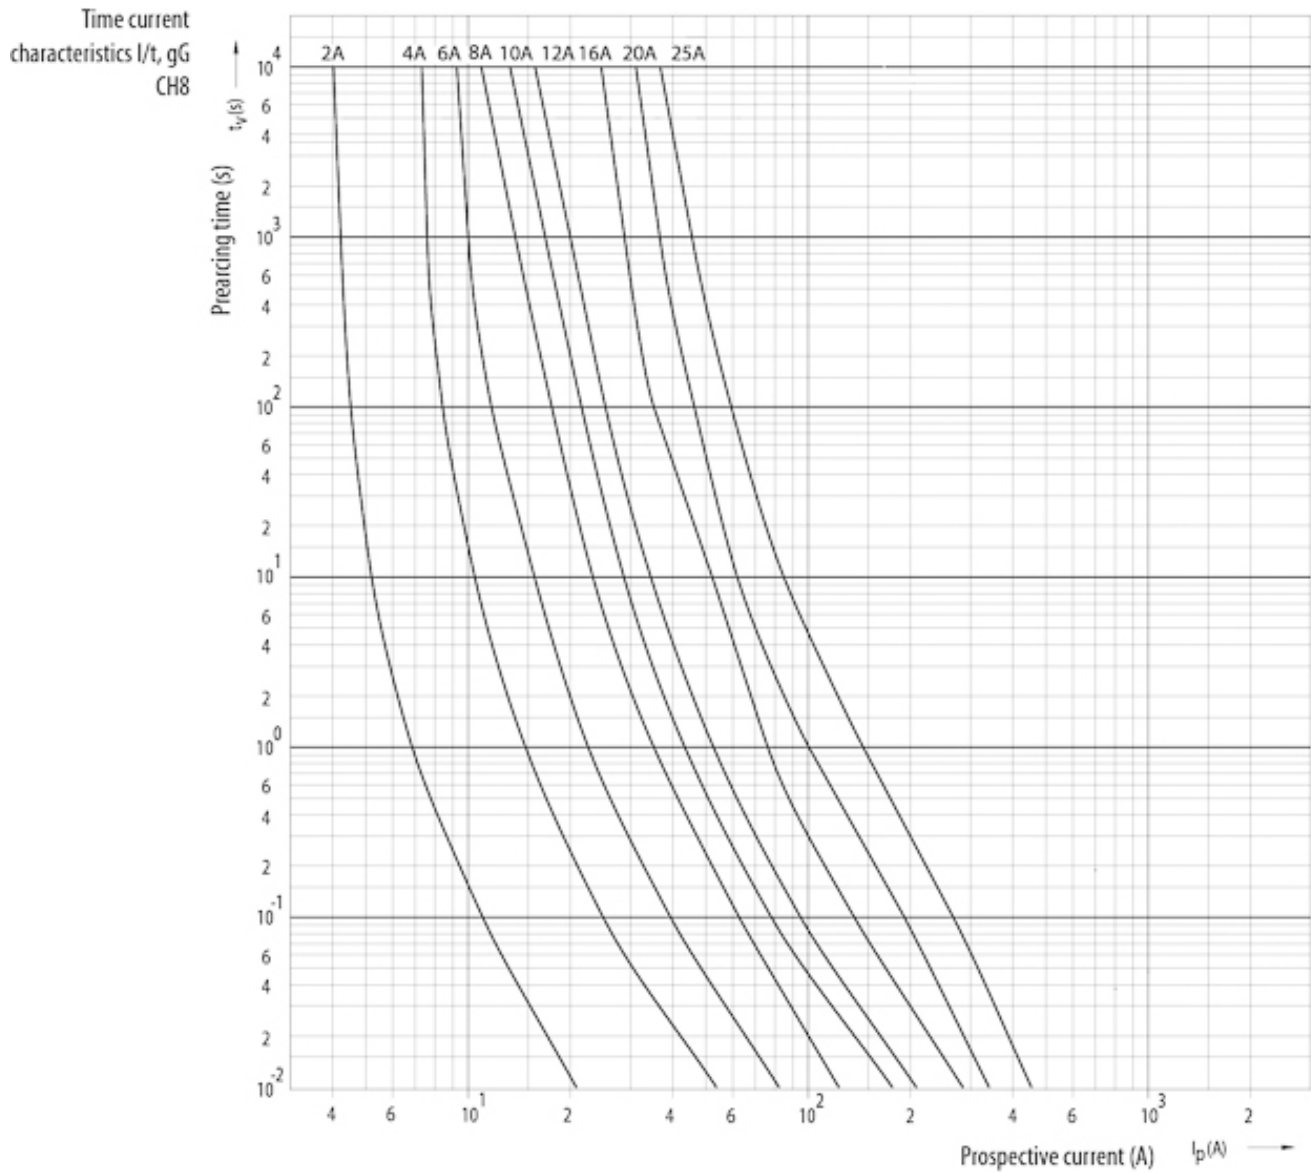

Dimension drawing

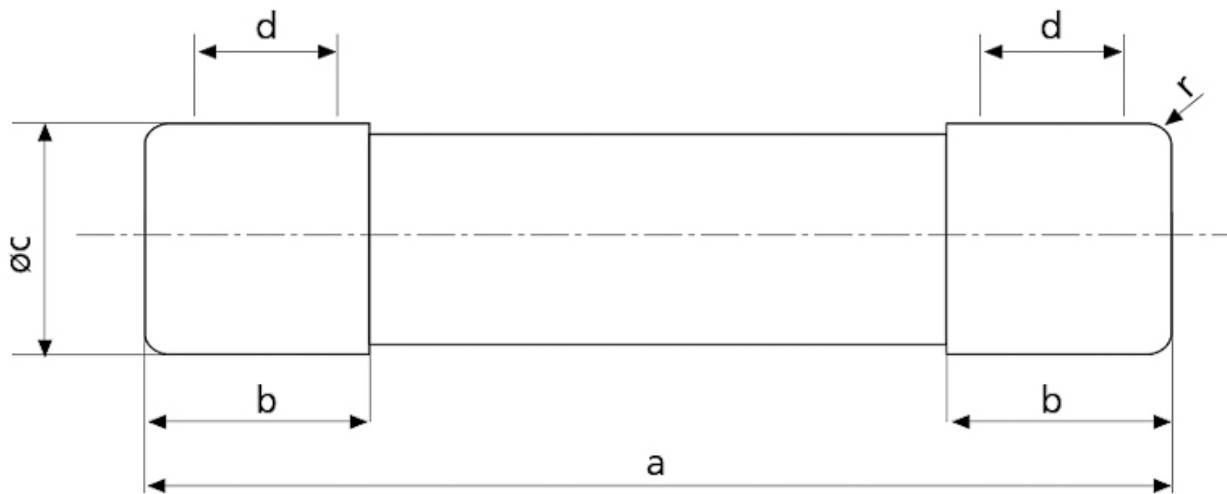

	a	$b_{\text{max.}}$	c	$d_{\text{min.}}$	r
8 x 32	$31,5 \pm 0,5$	6,7	$8,5 \pm 0,1$	4	$1 \pm 0,5$
10 x 38	$38,0 \pm 0,6$	10,5	$10,3 \pm 0,1$	6	$1,5 \pm 0,5$
14 x 51	$51,0 + 0,6 / -1$	13,8	$14,3 \pm 0,1$	7,5	± 1
22 x 58	$58,0 + 0,1$	16,2	$22,2 \pm 0,1$	11	± 1