

# FRS1 RELAY



## Subminiature SPDT RELAY

### FEATURES

Low coil power consumption


Small size and low cost

PCB mounting, DIL pitch terminal

Standard and high sensitive operation use

Dust cover or sealed type

  Recognized File No: E141516(N)



### SPECIFICATIONS

#### COIL RATING

RATED VOLTAGE (V DC)	COIL RESISTANCE Ω +/- 10 %			MUST OPERATE VOLTAGE	MUST DROPOUT VOLTAGE	MAXIMUM VOLTAGE	POWER CONSUMPTION
	FRS1(K)B	FRS1(K)	FRS1(K)H	% OF RATED VOLTAGE (AT +20°C)			(W)
3	20	25	45	75 Max.	10 Min.	110 Max.	FRS1(K)B: 0.45 FRS1(K) : 0.36 FRS1(K)H: 0.20
5	56	70	120				
6	80	100	180				
9	180	220	400				
12	320	400	700				
24	1280	1600	2800				

#### CHARACTERISTICS

Contact Arrangement	1 Form C (SPDT )
Contact Material	Silver Alloy (Gold Flash)
Contact Resistance	50m $\Omega$ Max.
Contact Rating (Resistive Load)	1A 125VAC / 30VDC 2A 125VAC / 30VDC 3A 125VAC / 30VDC 5A 125VAC / 30VDC (Only available for "B" type -- 0.45W)
Switching Voltage	DC60V Max. AC220V Max.
Operate Time (Initial)	5ms Max.
Release Time (Initial)	5ms Max.
Insulation Resistance	100M $\Omega$ Min. ( 500V DC)
Dielectric Strength	500Vrms, 1 minute between open contacts 500Vrms, 1 minute between coil and contact
Shock Resistance	10g Approx.
Vibration	10-55Hz, Double Amplitude 1.5mm
Ambient Temperature	-25°C to +75°C
Operation Life	Mechanical : 10 <sup>7</sup> Electrical : 10 <sup>5</sup>
Weight	4g Approx.

[Specifications are subject to change without notices.]

## FORWARD INDUSTRIAL COMPANY. (O/B COMMERCIAL UNION LTD)

RM. 1405, Wu Sang House, 655 Nathan Road, Mongkok, Kowloon, Hong Kong.

TEL : (852) 27892365 FAX : (852) 27893102 E-MAIL : sales@ficrelay.com.hk WEBSITE : <http://www.ficrelay.com.hk>

# FRS1 RELAY



## ORDERING INFORMATION

FRS1 H - S 3 - DC12V

RATED VOLTAGE

CONTACT RATING

NIL : HAND SOLDER  
S : SEALED TYPE

NIL : 0.36W  
B : 0.45W (AVAILABLE WITH 5AMP)  
H : 0.2W HIGH SENSITIVE


RELAY MODEL  
FRS1  
FRS1K

NIL: 1AMP  
2 : 2AMP  
3 : 3AMP  
5 : 5AMP (For "B" TYPE ONLY)


Note : Pb-Free and RoHS compliant relays are available.  
For ordering, please add suffix "Pb-Free" or "RoHS" to standard relay part numbers.  
For example : FRS1-S3 DC 12V "Pb-Free" for Pb-Free Relay  
For example : FRS1-S3 DC 12V "RoHS" for RoHS Compliance Relay

## DIMENSIONS (UNIT:mm)


FRS1

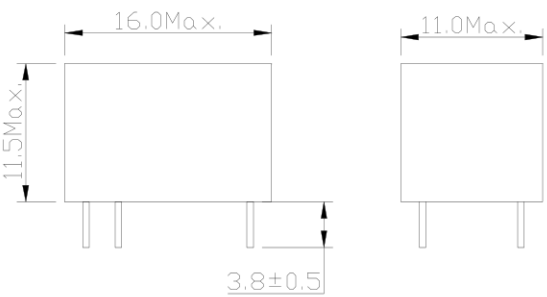


MOUNTING HOLES




TERMINAL  
ARRANGEMENT  
(BOTTOM VIEW)



FRS1K

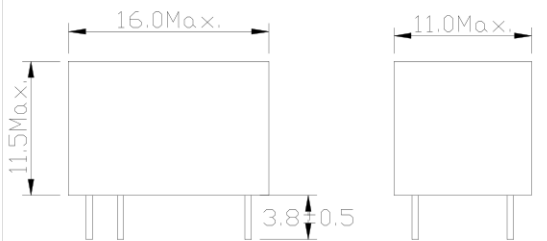

MOUNTING HOLES



TERMINAL  
ARRANGEMENT  
(BOTTOM VIEW)

