


- P.C.B. mount
- Sugar cube
- Sensitive DC coil
- Wash tight: RT III
- Basic insulation VDE 0435

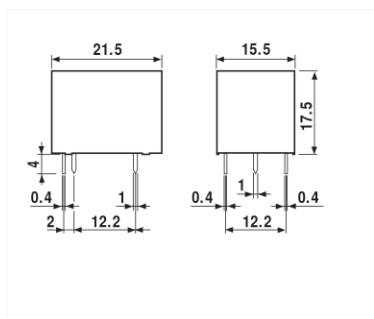

36.11

36.11....0300

- Sugar cube - 1 CO - P.C.B. mounting	- Sugar cube - 1 NO - P.C.B. mounting
Copper side view	Copper side view

Contact specifications			
Contact configuration		1 CO	1 NO
Rated current/ Maximum peak current	A	10/ 15	10/ 15
Rated voltage/ Maximum switching voltage	V AC	250/ 250	250/ 250
Rated load in AC1	VA	2,500	2,500
Rated load in AC15 (230 VAC)	VA	500	500
Single phase motor rating (230 VAC)	kW	0.37	0.37
Breaking capacity in DC1: 30/ 110/ 220V	A	10/ 0.3/ 0.12	10/ 0.3/ 0.12
Minimum switching load	mW (V/ mA)	500 (5/ 100)	500 (5/ 100)
Standard contact material		AgCdO	AgCdO
Coil specifications			
Nominal voltage (U_N)	V AC (50/ 60 Hz)	—	—
	V DC	3 - 5 - 6 - 9 - 12 - 24 - 48	3 - 5 - 6 - 9 - 12 - 24 - 48
Rated power AC/ sens. DC	VA (50 Hz)/ W	— / 0.36	— / 0.36
Operating range	AC	—	—
	DC	(0.75... 1.5) U_N	(0.75... 1.5) U_N
Holding voltage	AC/ DC	— / 0.4 U_N	— / 0.4 U_N
Must drop-out voltage	AC/ DC	— / 0.1 U_N	— / 0.1 U_N
Technical data			
Mechanical life AC/ DC	cycles	— / 10 · 10 ⁶	— / 10 · 10 ⁶
Electrical life at rated load AC1	cycles	100 · 10 ³	100 · 10 ³
Operate/ release time	ms	7/ 3	7/ 2
Insulation according to EN 61810-5		2.5 kV/ 2	2.5 kV/ 2
Insulation between coil and contacts (1.2/ 50μs)	kV	4	4
Dielectric strength between open contacts	V AC	1,000	1,000
Ambient temperature range	°C	-40... +85	-40... +85
Environmental protection		RT III	RT III
Approvals: (according to type)		GOST	GOST

ORDERING INFORMATION

Example: a 36 series miniature P.C.B. relay, 1 CO - 10 A contacts, with 12 V DC coil.

36

3 6 . 1 1 . 9 . 0 1 2 . 0 0 0 0

Series

Type

1 = P.C.B.

No. of poles

1 = 1 pole, 10 A

Coil version

9 = DC

Coil voltage

see coil specifications

A: Contact material

0 = Standard AgCdO

B: Contact circuit

0 = CO

3 = NO

D: Special versions

0 = Wash tight (RT III)

C: Options

0 = None

TECHNICAL DATA

INSULATION


INSULATION according to EN 61810-5	insulation rated voltage	V	250
	rated impulse withstand voltage	kV	2.5
	pollution degree		2
	overvoltage category		II

OTHER DATA

BOUNCE TIME: NO/NC	ms	1/6 (CO version)	1/- (NO version)
--------------------	----	------------------	------------------


CONTACT SPECIFICATIONS

F 36

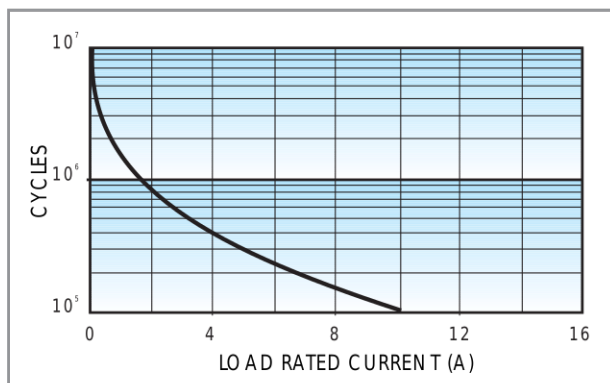

Electrical life vs AC1 load.

H 36

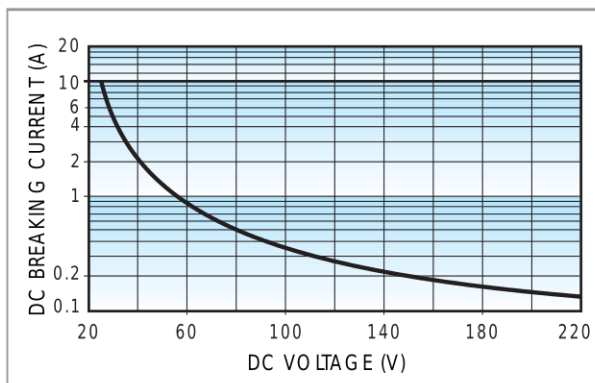

Breaking capacity in DC1 load.

- When switching a resistive load (DC1) having voltage and current values under the curve the expected electrical life is $\geq 100 \cdot 10^3$ cycles.
- In case of DC13 loads the connection of a diode in parallel with the load will permit the same electrical life as for a DC1 load.


Note: the release time of load will be increase.

COIL SPECIFICATIONS

DC VERSION DATA

Nominal voltage U_N	Coil code	Operating range		Resistance R	Rated coil consumption I at U_N
		U_{min}	U_{max}		
V		V	V	Ω	mA
3	9.003	2.2	4.5	25	120
5	9.005	3.7	7.5	70	72
6	9.006	4.5	9	100	60
9	9.009	6.7	13.5	225	40
12	9.012	9	18	400	30
24	9.024	18	36	1,600	15
48	9.048	36	72	6,400	7.5

R 36

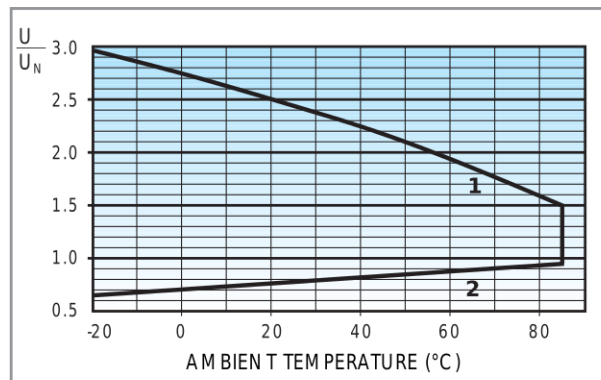

Operating range vs ambient temperature.

1 - Max coil voltage permitted.

2 - Min pick-up voltage with coil at ambient temperature.