
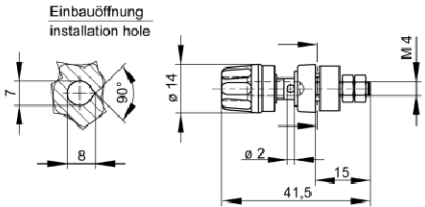


Sockets

PKI 10 A



| Product | PKI 10 A |
|--|--|
| description | Pole terminal with claw edge and captive insulated head and insulated ring. 4 mm diameter nickel-plated brass threaded bolt with 2 mm diameter transverse hole. For insulated, non-rotating installation in equipment chassis and switchpanels with a wall thickness up to 2 mm. |
| operating instruction | BA402 |
| article-no. / *colour | 9301031xx  Ni |
| drawing |  |
| technical data | |
| connection | M4 thread |
| rated voltage ⁽¹⁾ | 30 VAC / 60 VDC |
| measurement cat. acc. to IEC 61010 | O ⁽³⁾ |
| rated current ⁽¹⁾ (consider derating curve) | 35 A |
| material socket | brass, nickel plated |
| housing material | PF |
| temperature range acc. To IEC61010 ⁽²⁾ | -25 °C to +100 °C |
| inflammability class acc. to UL 94 (only valid for basic material of housing) | V-2 |
| standard | IEC 61010 |

4 mm system

⁽¹⁾ for normal environmental conditions -5°C to +40°C

⁽²⁾ contact the manufacturer for applications at deviating temperature ranges

⁽³⁾ without rated measurement category, for other circuits that are not directly connected to mains
stand: 15.06.2021