



# HITPOINT

TEL:8862-26013311

FAX:8862-26013898

NO.4 Lane 505, Zhongzheng Rd., Linkou Shiang, Taipei, Taiwan 24445 . R.O.C

## Piezo Electric Buzzer

### PL-27A30EPDYQ

(RoHS)

DATE:2019. 01. 10

#### 1 . Electrical Characteristics


VER .:4

Oscillation Frequency (KHz)	3.0 ±0.5
Operating Voltage (Vdc)	3 ~ 15
Rated Voltage (Vdc)	12
Current Consumption (mA/max.)	25 at Rated Voltage
Sound Pressure Level (dB/min.)	95 at 30cm at Rated Voltage
Tone/Pulse Rate	Slow Pulse 1.2 ±20% at Rated Voltage
Operating Temperature (°C)	-20 ~ +70
Storage Temperature (°C)	-30 ~ +80

Protection Level: IP68 Certified

#### 2 . Dimensions and Material

##### 2-1 Shape

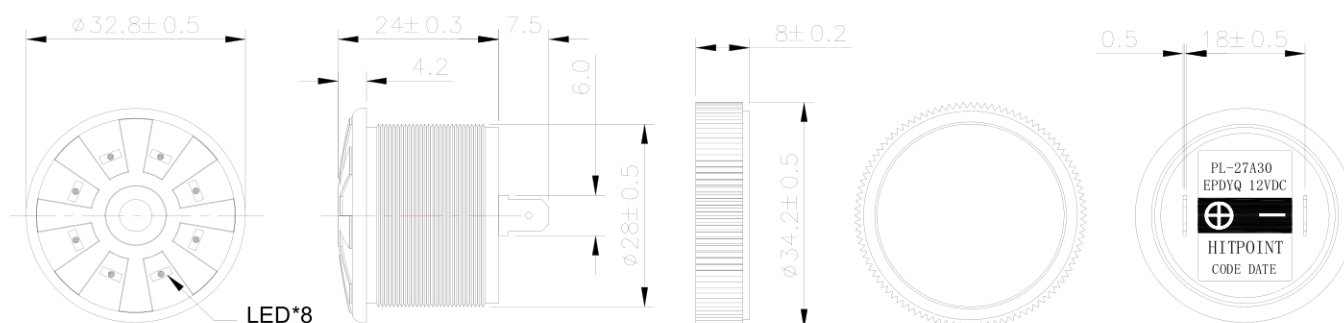

Unit : mm



# HITPOINT

TEL:8862-26013311

FAX:8862-26013898

NO.4 Lane 505, Zhongzheng Rd., Linkou Shiang, Taipei, Taiwan 24445 . R.O.C



## 2-2 Material

Housing	PC plastic resin (Color : Yellow)
Lead Pin	Tin Plated Brass
Weight (Gram)	17.8


## 3. TESTING METHOD

### • **Standard Measurement conditions**

Temperature:  $25 \pm 2^\circ\text{C}$  Humidity: 45-60%

### • **Acoustic Characteristics**

The oscillation frequency, current consumption and sound pressure are measured by the measuring instruments shown below.

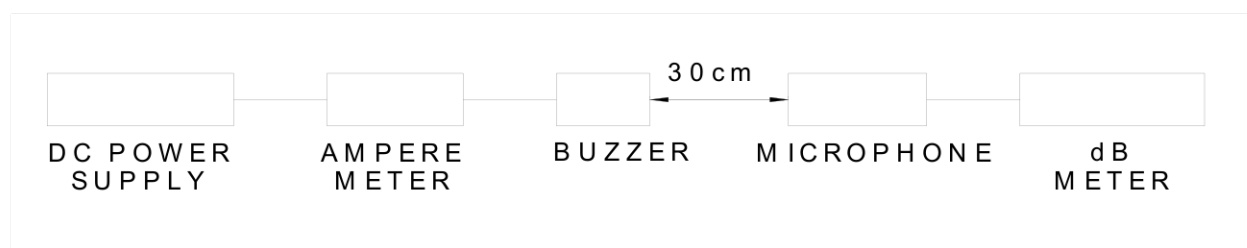



# HITPOINT

TEL:8862-26013311

FAX:8862-26013898

NO.4 Lane 505, Zhongzheng Rd., Linkou Shiang, Taipei, Taiwan 24445 . R.O.C

## 4. RELIABILITY

ITEMS	METHOD OF TEST AND MEASUREMENTS	PERFORMANCE
Coldness withstanding	After 98 hours of being exposed to -30 °C environment, should be returned to normal environment for 2 hours, then re-proceed to test.	No abnormality shall exist
Hotness withstanding	After 98 hours of being exposed to +80 °C environment, should be returned to normal environment for 2 hours, then re-proceed to test.	No abnormality shall exist
Humidity withstanding	After 98 hours of being exposed to 40 °C 95%RH environment in actual operation, should be returned to normal environment for 2 hours, then re-proceed to test.	No abnormality shall exist
Durability	Testing after 98 hours actual continuous operation.(at standard measurement conditions)	No abnormality shall exist
Drop withstanding	A natural drop from 75cm high down to the ground.	No abnormality shall exist
Vibration withstanding	Vibration of 2,000 cycles per minute, 2mm amplitude, applied in X, Y and Z directions for 30 minutes each.	No abnormality shall exist

## 5. PACKAGE METHOD

<1> 65pcs per box , Total 10 boxes per carton , total 650pcs per carton;  
Volume: L\*W\*H=520\*335\*290mm

< 2 > N . W . : ; 11.57 KGS ; G . W . : 13.57KGS ;

< 3 > RoHS Mark