

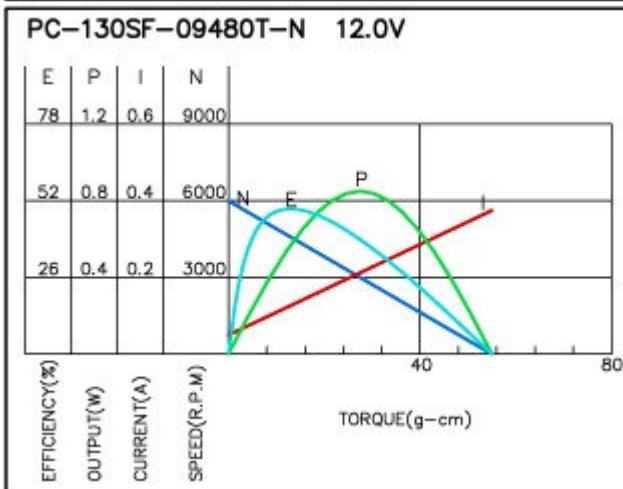
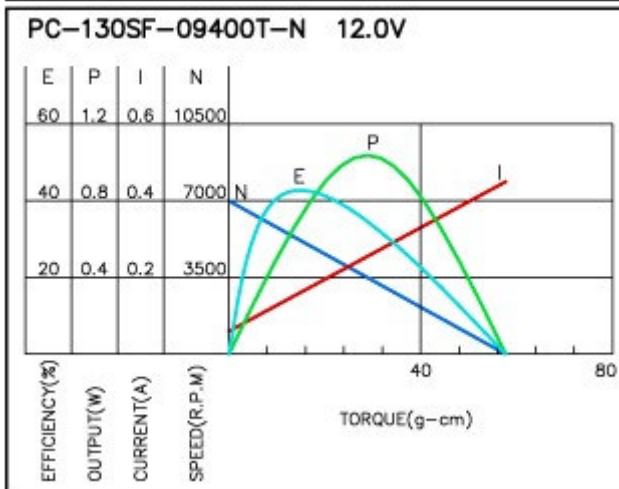


MODEL	VOLTAGE		NO LOAD		AT MAXIMUM EFFICIENCY					STALL		
	OPERATING RANGE	NOMNAL	SPEED	CURRENT	SPEED	CURRENT	TORQUE		OUTPUT	EFF	CURRENT	TORQUE
			rpm	A	rpm	A	g-cm	mN-m	w	%	A	g-cm mN-m
PC-130F-18120T-N	3.0~4.5	3.0V CONSTANT	9500	0.16	6260	0.505	8.10	0.79	0.52	35.63	1.40	31.00 3.04
PC-130F-12240T-N	3.0~9.0	6.0V CONSTANT	9500	0.10	6800	0.254	6.95	0.68	0.49	33.39	0.66	27.70 2.72
PC-130SF-09400T-N	6.0~24.0	12.0V CONSTANT	7000	0.06	5130	0.150	14.43	1.40	0.75	42.50	0.45	57.70 5.66
PC-130SF-09480T-N	6.0~24.0	12.0V CONSTANT	6000	0.05	4800	0.108	12.33	1.21	0.61	49.60	0.37	55.0 5.39

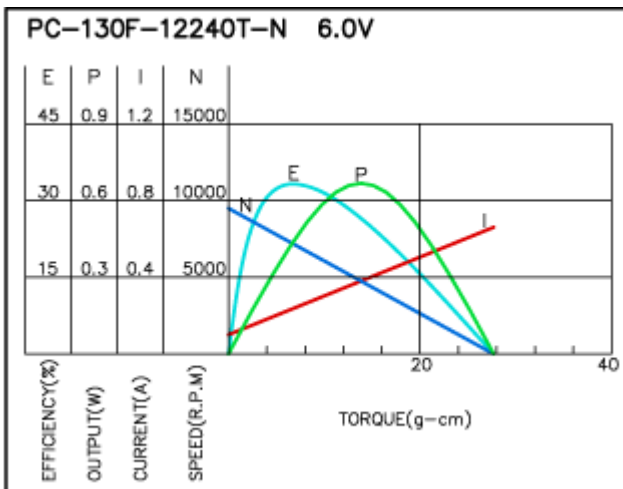

Size: mm

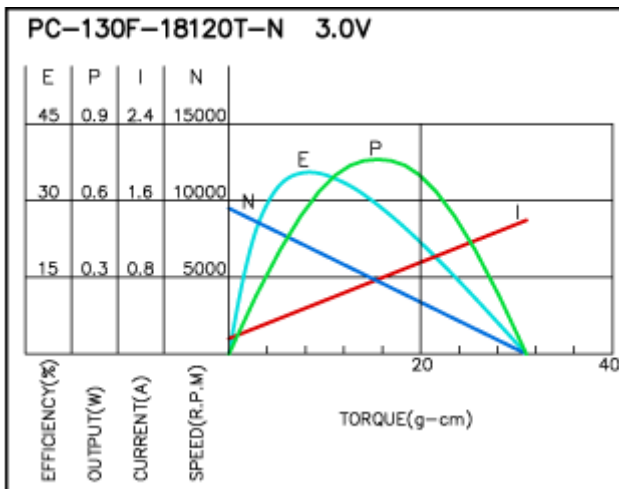