LOUDITY

SPECIFICATION SHEET


Туре	Unit	LD-BZPN-1705
Rated voltage (Square Wave)	V p-p	5
Operating Voltage	V p-p	1 - 30
*Rated Current(MAX)	mA	1
* Min Sound Output at 4 KHz/ 10cm	dB	78
*Resonant Frequency	Hz	4000 ± 500
Capacitance at 120Hz	рF	$15000 \pm 30\%$
Lead Pin Material	Pl	hosphor Bronze
Operating Temperature	° C	-20 - +70
Storage Temperature	° C	-30 - +80
Weight	g	1

*Value Applying at Rated Voltage.

DIMENSIONS

UNIT:mm

Tolerance: ± 0.5 mm

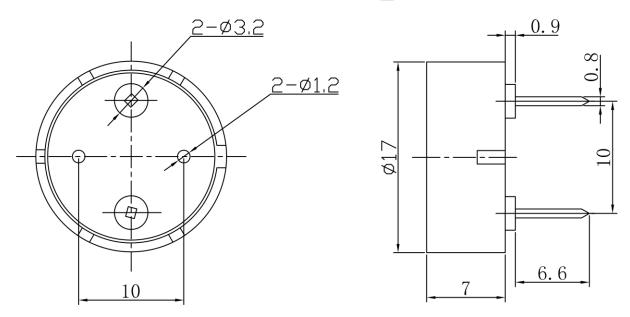

HOUSING METERIAL: NORYL WAVE SOLDER AND WASH NOT ALLOWED.