

# UUX

Chip Type, Wide Temperature Range




For SMD



Anti-Solvent Feature (Through 100V only)

- Chip type, operating over wide temperature range of to -55 to +105°C.
- Designed for surface mounting on high density PC board.
- Applicable to automatic mounting machine fed with carrier tape.
- Compliant to the RoHS directive (2011/65/EU).

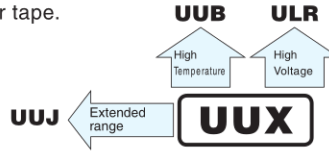


## Specifications


Item	Performance Characteristics												
Category Temperature Range	-55 to +105°C (6.3 to 100V), -40 to +105°C (160 to 400V)												
Rated Voltage Range	6.3 to 400V												
Rated Capacitance Range	1 to 1000μF												
Capacitance Tolerance	±20% at 120Hz, 20°C												
Leakage Current	Rated voltage (V)	6.3 to 100										160 to 400	
	Leakage Current	After 1 minute's application of rated voltage, leakage current is not more than 0.03CV (μA)										I = 0.04CV+100 (μA) max.(1 minute's)	
Tangent of loss angle (tan δ)	Measurement frequency : 120Hz at 20°C												
	Rated voltage (V)	6.3	10	16	25	35	50	63	100	160	200	250	400
Stability at Low Temperature	Measurement frequency: 120Hz												
	Rated voltage (V)	6.3	10	16	25	35	50	63	100	160	200	250	400
Endurance	Impedance ratio	Z-55°C / Z+20°C	4	4	3	3	3	2	3	4	—	—	—
	ZT / Z20 (MAX.)	Z-40°C / Z+20°C	—	—	—	—	—	—	—	—	6	6	6
Shelf Life	The specifications listed at right shall be met when the capacitors are restored to 20°C after the rated voltage is applied for 2000 hours (160 to 400V : 3000hours) at 105°C.												
	Capacitance change	Within ±20% of the initial capacitance value											
Resistance to soldering heat	tan δ	200% or less than the initial specified value											
	Leakage current	Less than or equal to the initial specified value											
Marking	Black print on the case top.												

## Chip Type



(φ6.3, φ8 × 6.2)



※ 1 Size φ8×6.2 only  
※ 2 Voltage mark for 6.3V is 「6V」.

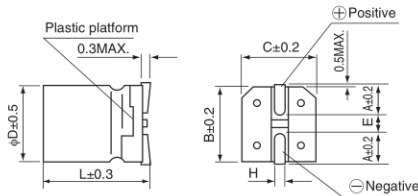


(φ8 × 10, φ10 × 10)

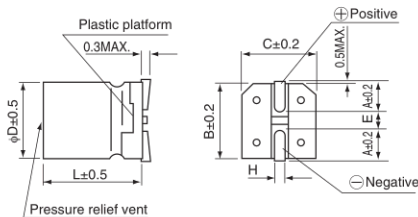

● Dimension table in next page.

## Type numbering system (Example : 10V 100μF)

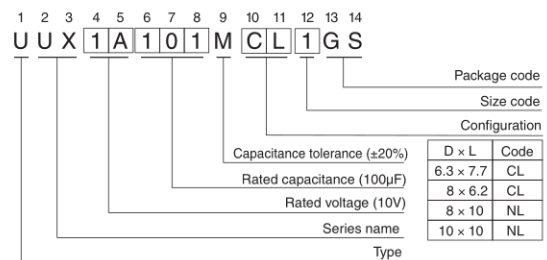

	(mm)			
±D×L	6.3 × 7.7	8 × 6.2	8 × 10	10 × 10
A	2.4	3.3	2.9	3.2
B	6.6	8.3	8.3	10.3
C	6.6	8.3	8.3	10.3
E	2.2	2.3	3.1	4.5
L	7.7	6.2	10	10
H	0.5 to 0.8	0.5 to 0.8	0.8 to 1.1	0.8 to 1.1

## UUX

### ■ Dimensions

Cap. (μF)	V	6.3		10		16		25		35		50		63		100		
		Code	0J	1A	1C	1E	1V	1H	1J	2A								
4.7	4R7															8x6.2	42	
10	100													8x6.2	51	8x10	75	
22	220											○ 8x6.2	67(64)	8x10	108	■ 10x10	150(121)	
33	330										○ 8x6.2	76(75)	8x10	133	■ 10x10	185(179)	10x10	180
47	470							○ 8x6.2	79(78)	8x10	124	■ 10x10	180(167)	10x10	220	10x10	230	
100	101		8x6.2	90	○ 8x10	148(111)	8x10	181	■ 10x10	304(283)	10x10	310	10x10	320				
220	221	○ 8x10	161(121)	8x10	173	■ 10x10	330(307)	■ 10x10	351(283)	10x10	450							
330	331	8x10	288	■ 10x10	318(296)	■ 10x10	441(410)	10x10	372									
470	471	■ 10x10	340(316)	■ 10x10	351(326)	10x10	489											
680	681	10x10	408	10x10	392													
1000	102	10x10	495														Case size φD x L (mm)	Rated ripple

Cap. (μF)	V	160		200		250		400	
		Code	2C	2D	2E	2G			
1	010						8x10	25	
1.8	1R8						8x10	26	
2.2	2R2						8x10	27	
3.3	3R3			8x10	31	8x10	31	10x10	38
3.9	3R9			8x10	34	8x10	34	10x10	39
4.7	4R7			8x10	37	8x10	37	10x10	40
6.8	6R8			8x10	44	8x10	44		
10	100	8x10	57	10x10	64	10x10	64		
18	180	10x10	64						

Rated ripple current (mA rms) at 105°C 120Hz

Size φ6.3 × 7.7 is available for capacitors marked. "○" / Size φ8 × 10 is available for capacitors marked. "■"  
 ※ In this case, [6] will be put at 12th digit of type numbering system.

### ● Frequency coefficient of rated ripple current

Cap. (μF)	Frequency	50 Hz	120 Hz	300 Hz	1 kHz	10 kHz or more
1 to 47	0.0	0.80	1.00	1.15	1.40	1.67
100 to 1000		0.85	1.00	1.08	1.20	1.30

- Taping specifications are given in page 23.
- Recommended land size, soldering by reflow are given in page 18, 19.
- Please select UUU(p.158) if high C/V products are required.
- Please refer to page 3 for the minimum order quantity.