

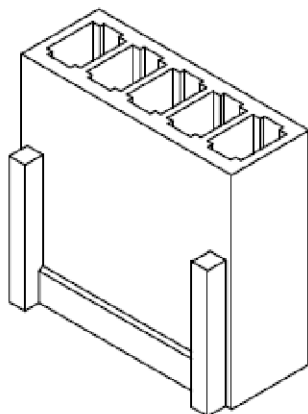
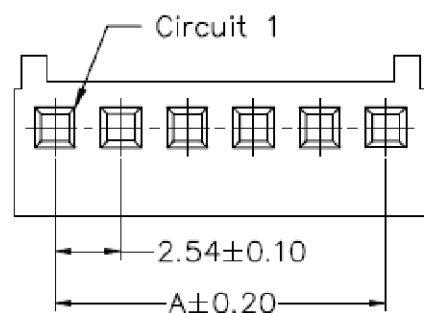


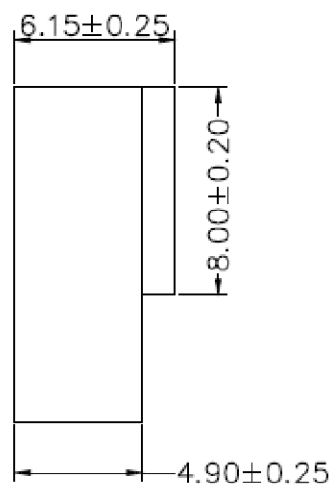

Current Rating: 4A AC,DC
Voltage Rating: 250V AC,DC
Temperature Range: -25°C ~ +85°C
Contact Resistance: 10mΩ Max
Insulation Resistance: 1000MΩ Min
Withstanding Voltage: 1000V AC/minute

PART NO.	Dimensions		PART NO.	Dimensions	
	A	B		A	B
02P	2.54	5.68	12P	27.94	31.08
03P	5.08	8.22	13P	30.48	33.62
04P	7.62	10.76	14P	33.02	36.16
05P	10.16	13.30	15P	35.56	38.70
06P	12.70	15.84	16P	38.10	41.24
07P	15.24	18.38	17P	40.64	43.78
08P	17.78	20.92	18P	43.18	46.32
09P	20.32	23.46	19P	45.72	48.86
10P	22.86	26.00	20P	48.26	51.40
11P	25.40	28.54			

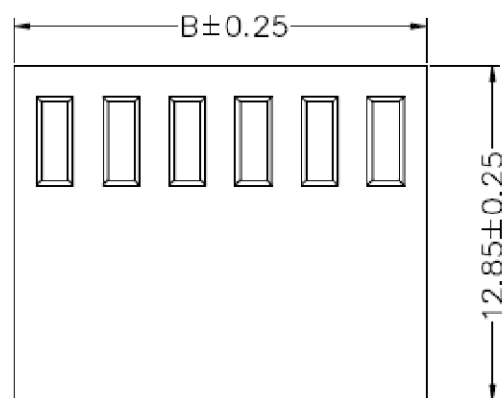

TYPE 1

				Ninigi			TITLE: 2.54mm PITCH HOUSING		
				UNIT	SCALE	SHEET			
				mm	1 : 1	1 of 1			
				DRAWN BY		APPROVED BY			
				王亮		張子波			
				2013.07.10		2013.07.10			
				GENERAL TOLERANCE					
A1	PRELIMINARY RELEASE	2022.05.30	周銳權	X. X±0. 25		ANGLE±			
A0	NEW RELEASE	2013.07.10	王亮	X. XX±0. 15					
REV.	DESCRIPTION	DATE	NAME	X. XXX±0. 05					
				DRAW NO. :			NS25-GXX	REV. A1	