


Viewed on Component Side

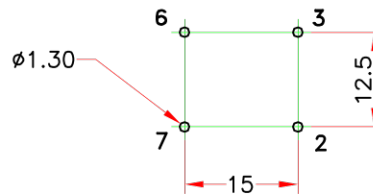

## TECHNICAL DATA :

- Core : Ø23 / Ø14 / H7  $\mu$ i 6000 Ferrite Material
- Wire : Ø0.63 Grade 1 Class F
- Rated Current Per Winding : 4A referred to 250V – 50Hz and +60°C ambient temperature
- Rated Inductance Per Winding : 2.7mH +50% –30% at 10KHz ; 0.1mA
- Rated DC Resistance Per Winding (Typical) : 45m $\Omega$
- Test Voltage Between Windings : 1500VAC – 50Hz , 2 sec
- Climatic Category : DIN GKC (–40 to +125°C; humidity cat. C)
- Case Material : PBT at 30% Fibreglass UL94V0
- Packaging Unit : 328 pieces

RoHS compliance

Please, refer to general catalog for unspecified parameters.

a	
IND	DATE

## Radiohm Specification



Designation : 42V30 4000

Part number : \_\_\_\_\_  
 Preliminary :  Final :

Date : 02/01/2012

## Customer Specification Approval

Part number : \_\_\_\_\_

Signature : \_\_\_\_\_ Name : \_\_\_\_\_ Title : \_\_\_\_\_ Date : \_\_\_\_\_