


Viewed On Component Side

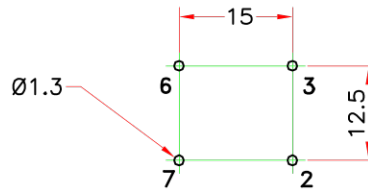

### TECHNICAL DATA :

- Core : Toroid  $\emptyset$  25 /  $\emptyset$  15 / H 10  $\mu$ i 6000 Ferrite Material
- Wire :  $\emptyset$ 0.315 Grade 1 Class F
- Rated Current Per Winding : 1A referred to 250V – 50Hz and +60°C ambient temperature
- Rated Inductance Per Winding : 47mH –30% +50% at 10KHz , 0.1mA
- Rated DC Resistance Per Winding ( Typical) : 750m $\Omega$
- Test Voltage Between Windings : 1500VAC – 50Hz
- Climatic Category : DIN GKC (–40 to +125°C; humidity cat. C)
- Case Material : PBT at 30% Fibreglass UL94V0
- Packaging Unit : 286 pieces

RoHS compliance  
Please, refer to general catalog for unspecified parameters.

a	
IND	DATE

### Radiohm Specification



Designation : 42V32 1000

Part number : \_\_\_\_\_  
Preliminary :  Final :

Date : 16/11/2005

### Customer Specification Approval

Part number : \_\_\_\_\_

Signature : \_\_\_\_\_ Name : \_\_\_\_\_ Title : \_\_\_\_\_ Date : \_\_\_\_\_