
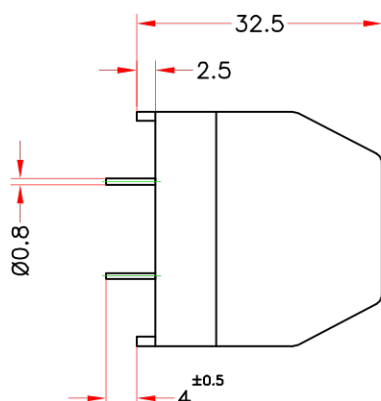


Viewed On Component Side

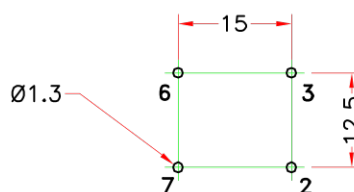

TECHNICAL DATA :

Core : Toroid Ø 25 / Ø 15 / H 10 μ i 6000 Ferrite Material

Wire : Ø0.45 Grade 1 Class F

Rated Current Per Winding : 2A referred to 250V – 50Hz and +60°C ambient temperature

Rated Inductance Per Winding : 6.8mH –30% +50% at 10KHz , 0.1mA

Rated DC Resistance Per Winding (Typical) : 139m Ω

Test Voltage Between Windings : 1500VAC – 50Hz

Climatic Category : DIN GKC (–40 to +125°C; humidity cat. C)

Case Material : PBT at 30% Fibreglass UL94V0

Packaging Unit : 286 pieces

RoHS compliance

Please, refer to general catalog for unspecified parameters.

a	
IND	DATE

Radiohm Specification



Designation : 42V32 2000

Part number : _____
Preliminary : ☐ Final : ☒

Date : 16/11/2005

Customer Specification Approval

Part number : _____

Signature : _____ Name : _____ Title : _____ Date : _____