


# R13-244

## Double Poles Of R13-112

T85

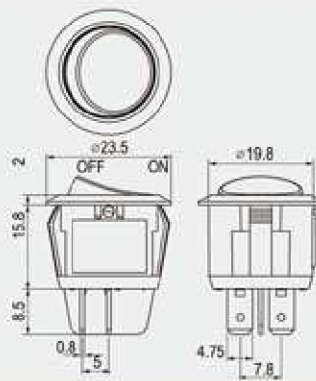

### Rating

16A 125V AC/10A 250V AC  
10(4)A 125 / 250V AC

### Contact resistance

50m $\Omega$  Max

### Insulation resistance

DC 500V 100M $\Omega$  Min

### Dielectric strength


AC 1500V 1 minute

### Cut-out



0.7~3.0 mm max

### Cut-out for X8 ROCKER



0.7~2.5 mm max

### ROCKER



## FEATURES

- \* MATERIAL: Frame is nylon (UL flame: 94V-2). Terminals are silver plated brass.
- \* Illuminated actuators are molded in PC, available with red, amber, green, blue and white colors.
- \* Snap-in mounting, easy to install switch into panel.
- \* Waterproof cover is optional.




## Ordering number instruction

R13-244 -

### FUNCTION


Different position / Illuminated button (動作特性不同/帶燈)

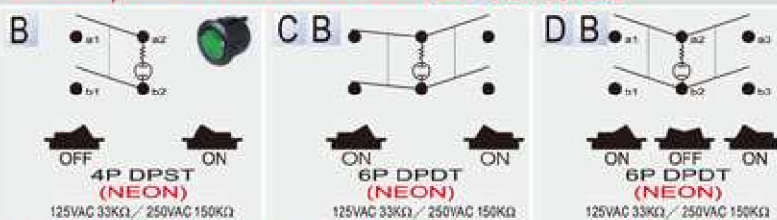


### TERMINAL

0 2 .187" SQ

Different position (動作特性不同)

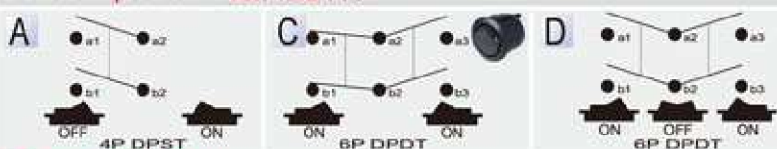

Momentary (彈回)

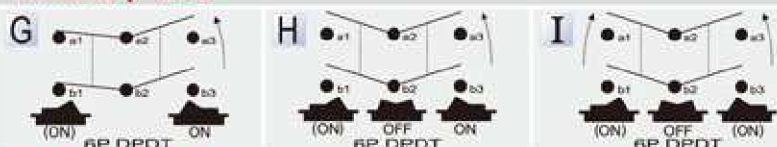

Waterproof (防水)

