






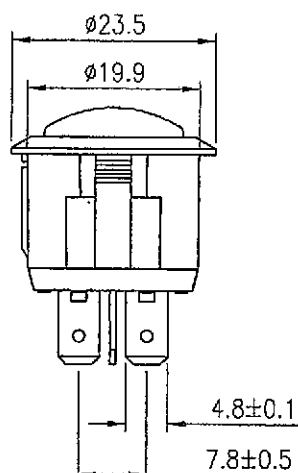


Rating	20A 12V DC	Mounting Hole	
Contact Resistance	50m ohm Max		
Insulation Resistance	DC 500V 100M ohm Min		
Dielectric Strength	AC 1500V 1 minute		
Operation Temperature	-20°C~85°C		
Switch Function	4P DPST ON-OFF(Bulb dependent)		

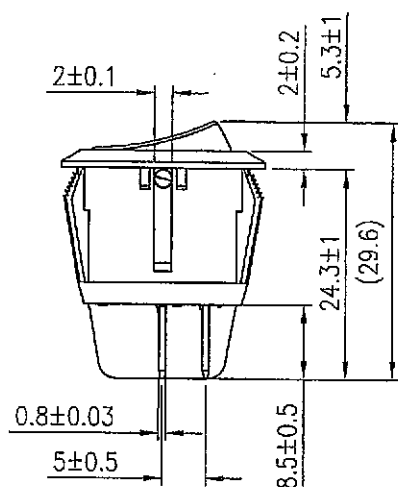

Material:
Frame: Black, Nylon 66
Actuator: Red, PC
Printed: None

Circuit Diagram



1、Tolerances ± 0.3 Unless Otherwise Specified

Date	Name	Description						No.	
Drawn	Checked	Approved	SCI BOM No.	1823047	Model Name	ROCKER SWITCH			
曾敏捷			Customer No.		Model No.	R13-244B-02	Rev.		
06/23/17	6/23-117	6/20-17	Unit	mm	Shin Chin Industrial Co., Ltd.				0