


# AZ7709

## SPST SUBMINIATURE POWER RELAY

### FEATURES

- 4 kV dielectric strength
- Proof tracking index (PTI/CTI) 250
- 5 A switching capability (high capacity version: 10 A)
- Epoxy sealed version available
- UL Class F insulation (155°C) available
- UL, CUR file E365652
- TÜV B 088793 0007

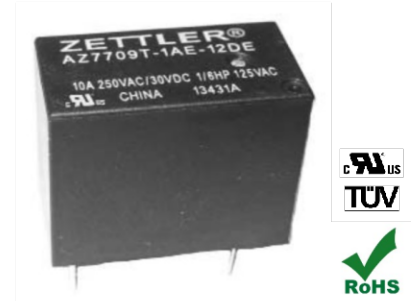

### CONTACTS

<b>Arrangement</b>	SPST (1 Form A)
<b>Ratings (max.)</b>	(resistive load)
switched power	150 W or 1250 VA
switched current	5 A
switched voltage	30 VDC* or 250 VAC
High cap. version	
switched power	300 W or 2500 VA
switched current	10 A
switched voltage	30 VDC* or 250 VAC

\* Note: If switching voltage is greater than 30 VDC, special precautions must be taken. Please contact the factory.

### Rated Loads

UL, CUR

<b>Standard coil</b>
5 A at 250 VAC, resistive, 85°C, 100k cycles [1][2]
5 A at 30 VDC, resistive, 85°C, 100k cycles [1][2]
1/6 HP at 125/250 VAC, 85°C, 100k cycles [1][2]
<b>Sensitive coil</b>
3 A at 250 VAC, resistive, 85°C, 100k cycles [1][2]
3 A at 30 VDC, resistive, 85°C, 100k cycles [1][2]
<b>High cap. Version - Standard coil</b>
10 A at 250 VAC, resistive, 85°C, 100k cycles [1][2]
10 A at 30 VDC, resistive, 85°C, 100k cycles [1][2]
1/6 HP at 125/250 VAC, 85°C, 100k cycles [1][2]
TV-5 at 120 VAC, 25k cycles [1]
<b>High cap. Version - Sensitive coil</b>
8 A at 250 VAC, resistive, 85°C, 100k cycles [1][2]
8 A at 30 VDC, resistive, 85°C, 100k cycles [1][2]

TÜV	<b>Standard coil</b>
	5 A at 250 VAC, resistive, 100k cycles [1]
	<b>Sensitive coil</b>
	3 A at 250 VAC, resistive, 100k cycles [1]
	<b>High cap. Version - Standard coil</b>
	10 A at 250 VAC, resistive, 100k cycles [1]
	<b>High cap. Version - Sensitive coil</b>
	8 A at 250 VAC, resistive, 100k cycles [1]

<b>Contact materials</b>	Silver tin oxide [1] Silver tin oxide indium oxide [2] Gold plating available
--------------------------	---

<b>Initial resistance</b>	< 100 mΩ
---------------------------	----------

### GENERAL DATA

<b>Life Expectancy</b>	(minimum operations)
Mechanical	1 x 10 <sup>7</sup>
Electrical	1 x 10 <sup>5</sup> at 5 A 250 VAC resistive
High cap. version	
Mechanical	1 x 10 <sup>7</sup>
Electrical	1 x 10 <sup>5</sup> at 10 A 250 VAC resistive
<b>Operate Time</b>	8 ms (max.) at nominal coil voltage
<b>Release Time</b>	4 ms (max.) at nominal coil voltage, without coil suppression
<b>Dielectric Strength</b>	(at sea level for 1 min.) 4000 V <sub>RMS</sub> coil to contact 1000 V <sub>RMS</sub> between open contacts
<b>Insulation Resistance</b>	1000 MΩ (min.) at 20°C, 500 VDC, 50% RH
<b>Insulation</b>	(according to DIN VDE 0110, IEC 60664-1) C250 Overvoltage category: III Pollution degree: 3 Nominal voltage: 250 VAC
<b>Temperature Range</b>	(at nominal coil voltage)
Operating	-40°C (-40°F) to 85°C (185°F)
<b>Vibration resistance</b>	1.65 mm (0.065") DA at 10–55 Hz
<b>Shock</b>	10 g operating, 100 g damage
<b>Enclosure</b>	P.B.T. polyester
<b>Terminals</b>	Tinned copper alloy, P. C.
<b>Soldering</b>	
Max. Temperature	270°C (518°F)
Max. Time	5 seconds
<b>Cleaning</b>	
Max. Solvent Temp.	80°C (176°F)
Max. Immersion Time	30 seconds
<b>Dimensions</b>	
length	18.9 mm (0.718")
width	10.7 mm (0.403")
height	15.7 mm (0.618")
<b>Weight</b>	6 grams (approx.)
<b>Packing unit in pcs</b>	100 per tray / 1000 per carton box
<b>Compliance</b>	UL 508, IEC 61810-1, RoHS, REACH

**ZETTLER electronics GmbH** - A ZETTLER GROUP Company

Junkersstr. 3, D-82178 Puchheim, Germany

phone: +49 89 800 97-0  
fax: +49 89 800 97-200

office@ZETTLERelectronics.com  
www.ZETTLERelectronics.com

This product specification to be used only together with the application notes which can be downloaded from [www.ZETTLERelectronics.com/pdfs/relais/ApplicationNotes.pdf](http://www.ZETTLERelectronics.com/pdfs/relais/ApplicationNotes.pdf)

# AZ7709

## COIL

<b>Nominal coil DC voltages</b>	see coil voltage specifications tables
<b>Dropout</b>	> 5% of nominal coil voltage
<b>Nominal power</b>	(approx.)
standard coil	450 mW
sensitive coil	200 mW
<b>Power at pickup voltage</b>	(typ.)
standard coil	220 mW
sensitive coil	113 mW
<b>Max. continuous dissipation</b>	760 mW at 20°C (68°F) ambient
<b>Temperature Rise</b>	(at nominal coil voltage)
standard coil	41 K (74°F)
sensitive coil	22 K (40°F)
<b>Max. temperature</b>	105°C (221°F) - Class A 155°C (311°F) - Class F

## COIL VOLTAGE SPECIFICATIONS

### Standard Coil

Nominal Coil VDC	Must Operate VDC	Max. Continuous VDC	Resistance Ohm ± 10%
3	2.1	3.9	20
5	3.5	6.5	55
6	4.2	7.8	80
9	6.3	11.7	180
12	8.4	15.6	320
18	12.6	23.4	720
24	16.8	31.2	1280
48	33.6	62.4	5120

### Sensitive Coil


Nominal Coil VDC	Must Operate VDC	Max. Continuous VDC	Resistance Ohm ± 10%
3	2.25	3.9	45
5	3.75	6.5	125
6	4.5	7.8	180
9	6.75	11.7	400
12	9.0	15.6	720
18	13.5	23.4	1620
24	18.0	31.2	2800

## NOTES

1. All values at 20°C (68°F).
2. Relay may pull in with less than "Must Operate" value.
3. Specifications subject to change without notice.

## ORDERING DATA

AZ7709  - 1A  -   D

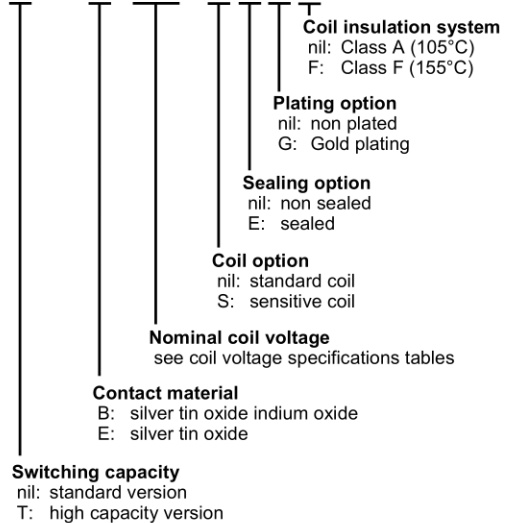

### Example ordering data

AZ7709-1AE-12DF Standard version, silver tin oxide contacts, 12 VDC nominal coil voltage, standard coil, non sealed, non gold plated, class F insulation system

AZ7709T-1AE-24DSEGF High capacity version, silver tin oxide contacts, 24 VDC nominal coil voltage, sensitive coil, sealed, gold plated, class F insulation system

**ZETTLER electronics GmbH** - A ZETTLER GROUP Company

Junkersstr. 3, D-82178 Puchheim, Germany

phone: +49 89 800 97-0  
fax: +49 89 800 97-200


office@ZETTLERelectronics.com  
www.ZETTLERelectronics.com

This product specification to be used only together with the application notes which can be downloaded from [www.ZETTLERelectronics.com/pdfs/relais/ApplicationNotes.pdf](http://www.ZETTLERelectronics.com/pdfs/relais/ApplicationNotes.pdf)

# AZ7709


## MECHANICAL DATA

Dimensions in inches with metric equivalents in parentheses. Tolerance:  $\pm .010$ "

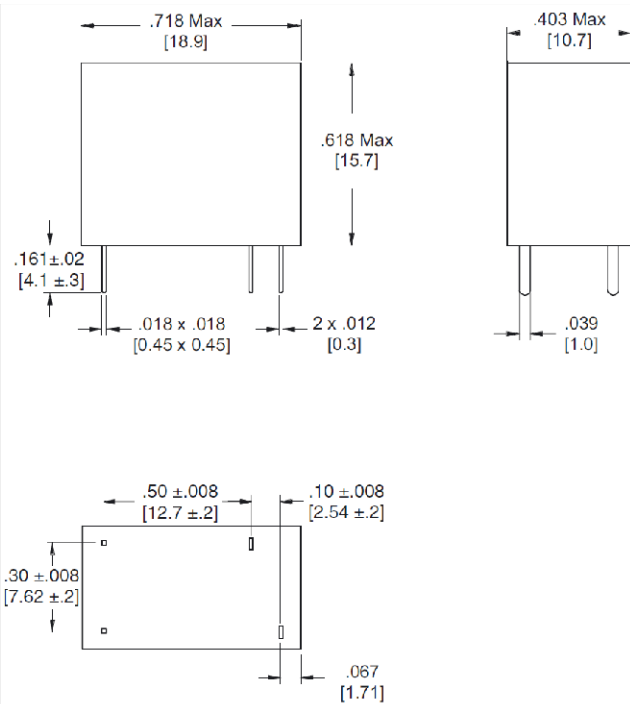

## PC BOARD LAYOUT

Viewed towards terminals

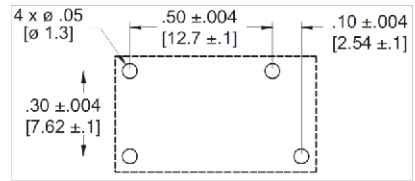

## WIRING DIAGRAMS

Viewed towards terminals



**ZETTLER electronics GmbH** - A ZETTLER GROUP Company

Junkersstr. 3, D-82178 Puchheim, Germany

phone: +49 89 800 97-0  
fax: +49 89 800 97-200

office@ZETTLERelectronics.com  
www.ZETTLERelectronics.com

This product specification to be used only together with the application notes which can be downloaded from [www.ZETTLERelectronics.com/pdfs/relais/ApplicationNotes.pdf](http://www.ZETTLERelectronics.com/pdfs/relais/ApplicationNotes.pdf)