

SWITCHING REGULATOR AND HIGH VOLTAGE SWITCHING APPLICATIONS.

HIGH SPEED DC-DC CONVERTER APPLICATION.


**FEATURES:**

- Excellent Switching Times :  $t_r=1.0\mu s$  (Max.),  $t_f=1.0\mu s$  (Max.) at  $I_C=4A$
- High Collector Breakdown Voltage :  $V_{CEO}=400V$

**MAXIMUM RATINGS (Ta=25°C)**

CHARACTERISTIC		SYMBOL	RATING	UNIT
Collector-Base Voltage		$V_{CBO}$	500	V
Collector-Emitter Voltage		$V_{CEO}$	400	V
Emitter-Base Voltage		$V_{EBO}$	7	V
Collector Current	DC	$I_C$	5	A
	Pulse	$I_{CP}$	7	
Base Current		$I_B$	1	A
Collector Power Dissipation	Ta=25°C	$P_C$	1.7	W
	Tc=25°C		60	
Junction Temperature		$T_j$	150	°C
Storage Temperature Range		$T_{stg}$	-55 ~ 150	°C


INDUSTRIAL APPLICATIONS  
Unit in mm

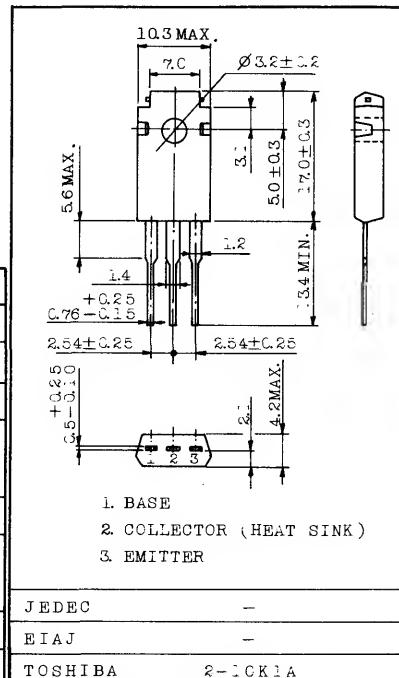


**ELECTRICAL CHARACTERISTICS (Ta=25°C)**

CHARACTERISTIC		SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Collector Cut-off Current		$I_{CBO}$	$V_{CB}=400V$ , $I_E=0$	-	-	100	μA
Emitter Cut-off Current		$I_{EBO}$	$V_{EB}=7V$ , $I_C=0$	-	-	1	mA
Collector-Base Breakdown Voltage		$V_{(BR)CBO}$	$I_C=1mA$ , $I_E=0$	500	-	-	V
Collector-Emitter Breakdown Voltage		$V_{(BR)CEO}$	$I_C=10mA$ , $I_B=0$	400	-	-	V
DC Current Gain	$h_{FE}$		$V_{CE}=5V$ , $I_C=3A$	12	-	-	
			$V_{CE}=5V$ , $I_C=5A$	8	-	-	
Collector-Emitter Saturation Voltage		$V_{CE(sat)}$	$I_C=5A$ , $I_B=1A$	-	-	1.0	V
Base-Emitter Saturation Voltage		$V_{BE(sat)}$	$I_C=5A$ , $I_B=1A$	-	-	1.5	V
Switching Time	Rise Time	$t_r$	$I_{BL} \rightarrow I_{B2}$ (20μs) $I_{BL} = -I_{B2} = 0.4A$ $DUTY CYCLE < 1\%$	-	-	1.0	μs
	Storage Time	$t_{stg}$		-	-	2.5	
	Fall Time	$t_f$		-	-	1.0	


### SWITCHING CHARACTERISTICS

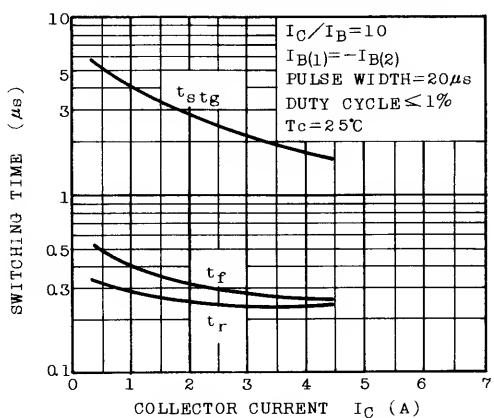


### $I_C - V_{CE}$ (LOW VOLTAGE REGION)

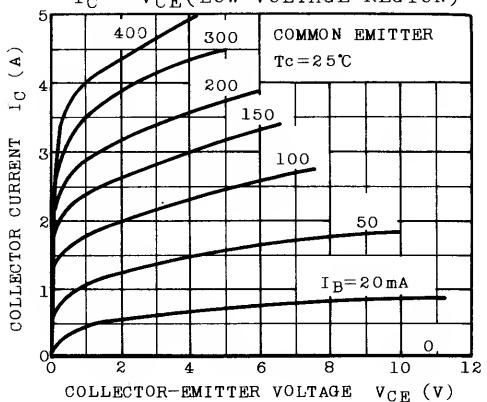


### $h_{FE} - I_C$

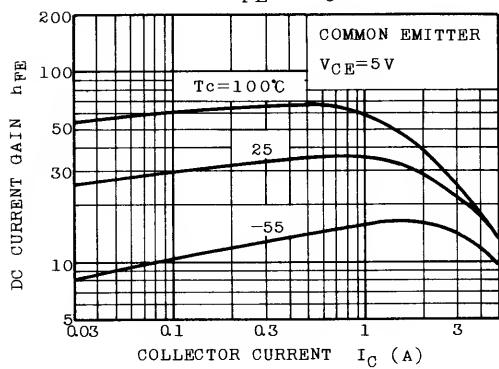


### $V_{CE(sat)} - I_C$

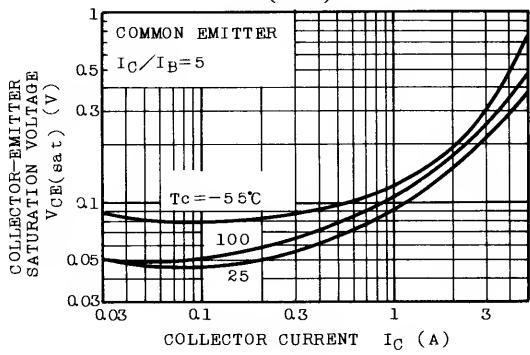

### $V_{BE(sat)} - I_C$

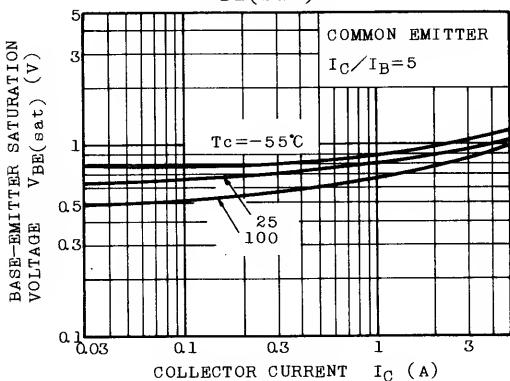

### $I_C - V_{BE}$

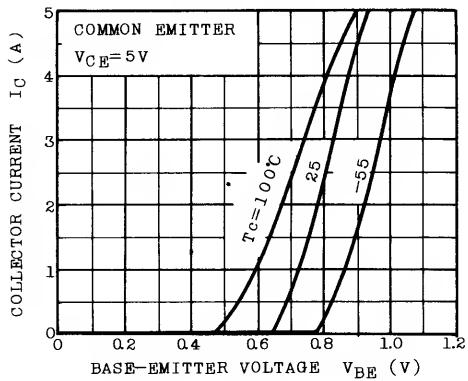

# 2SC3236

