


Standard Rectifier



Phase leg


$$V_{RRM} = 2 \times 1200V$$

$$I_{FAV} = 8A$$


$$V_F = 1.08V$$

Part number

DSP8-12A

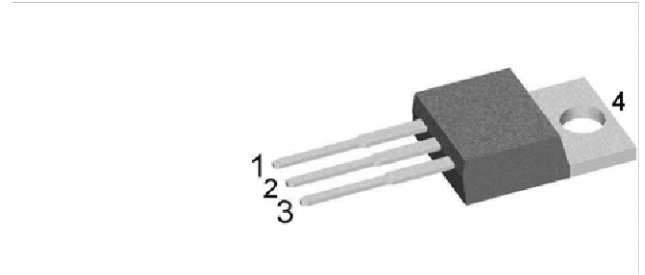

Backside: anode/cathode

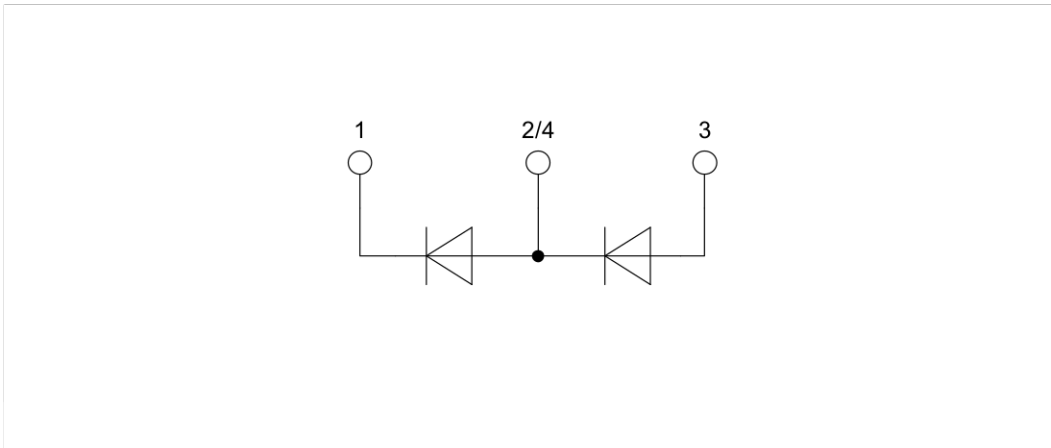

Features / Advantages:

- Planar passivated chips
- Very low leakage current
- Very low forward voltage drop
- Improved thermal behaviour

Applications:



- Diode for main rectification
- For single and three phase bridge configurations

Package: TO-220

- Industry standard outline
- RoHS compliant
- Epoxy meets UL 94V-0

Rectifier				Ratings			
Symbol	Definition	Conditions	min.	typ.	max.	Unit	
V_{RSM}	max. non-repetitive reverse blocking voltage				1300	V	
V_{RRM}	max. repetitive reverse blocking voltage				1200	V	
I_R	reverse current, drain current	$V_R = 1200$ V			10	μ A	
		$V_R = 1200$ V			0.2	mA	
V_F	forward voltage drop	$I_F = 8$ A			1.16	V	
		$I_F = 16$ A			1.35	V	
		$I_F = 8$ A	$T_{VJ} = 150^\circ$ C			1.08	V
		$I_F = 16$ A				1.34	V
I_{FAV}	average forward current	$T_C = 160^\circ$ C rectangular $d = 0.5$			8	A	
V_{FO}	threshold voltage	} for power loss calculation only			0.79	V	
r_F	slope resistance				33	m Ω	
R_{thJC}	thermal resistance junction to case				1.5	K/W	
R_{thCH}	thermal resistance case to heatsink			0.50		K/W	
P_{tot}	total power dissipation				100	W	
I_{FSM}	max. forward surge current	$t = 10$ ms; (50 Hz), sine	$T_{VJ} = 45^\circ$ C		120	A	
		$t = 8,3$ ms; (60 Hz), sine	$V_R = 0$ V		130	A	
		$t = 10$ ms; (50 Hz), sine	$T_{VJ} = 150^\circ$ C			100	A
		$t = 8,3$ ms; (60 Hz), sine	$V_R = 0$ V			110	A
I^2t	value for fusing	$t = 10$ ms; (50 Hz), sine	$T_{VJ} = 45^\circ$ C		72	A ² s	
		$t = 8,3$ ms; (60 Hz), sine	$V_R = 0$ V		70	A ² s	
		$t = 10$ ms; (50 Hz), sine	$T_{VJ} = 150^\circ$ C			50	A ² s
		$t = 8,3$ ms; (60 Hz), sine	$V_R = 0$ V			50	A ² s
C_J	junction capacitance	$V_R = 400$ V $f = 1$ MHz	$T_{VJ} = 25^\circ$ C		4	pF	

Package TO-220			Ratings			
Symbol	Definition	Conditions	min.	typ.	max.	Unit
I_{RMS}	RMS current	per terminal			25	A
T_{stg}	storage temperature		-55		150	°C
T_{VJ}	virtual junction temperature		-55		175	°C
Weight				2		g
M_D	mounting torque		0.4		0.6	Nm
F_C	mounting force with clip		20		60	N

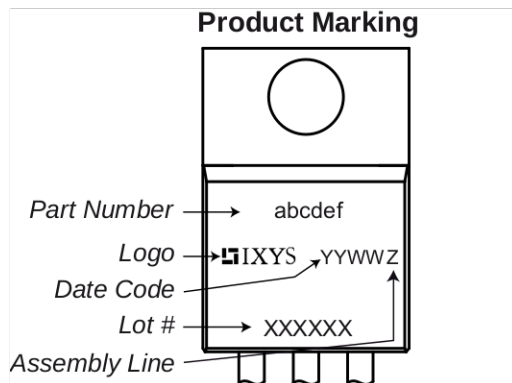


Ordering	Part Number	Marking on Product	Delivery Mode	Quantity	Code No.
Standard	DSP8-12A	DSP8-12A	Tube	50	465062

Similar Part	Package	Voltage class
DSP8-12AC	ISOPLUS220AB (3)	1200
DSP8-12S	TO-263AB (D2Pak) (2)	1200
DSP8-12AS	TO-263AA (D2Pak) (3)	1200
DSP8-08A	TO-220AB (3)	800
DSP8-08S	TO-263AB (D2Pak) (2)	800
DSP8-08AS	TO-263AA (D2Pak) (3)	800

Equivalent Circuits for Simulation

* on die level


$T_{VJ} = 175^\circ\text{C}$




Rectifier

$V_{0\ max}$	threshold voltage	0.79	V
$R_{0\ max}$	slope resistance *	30	mΩ

Outlines TO-220

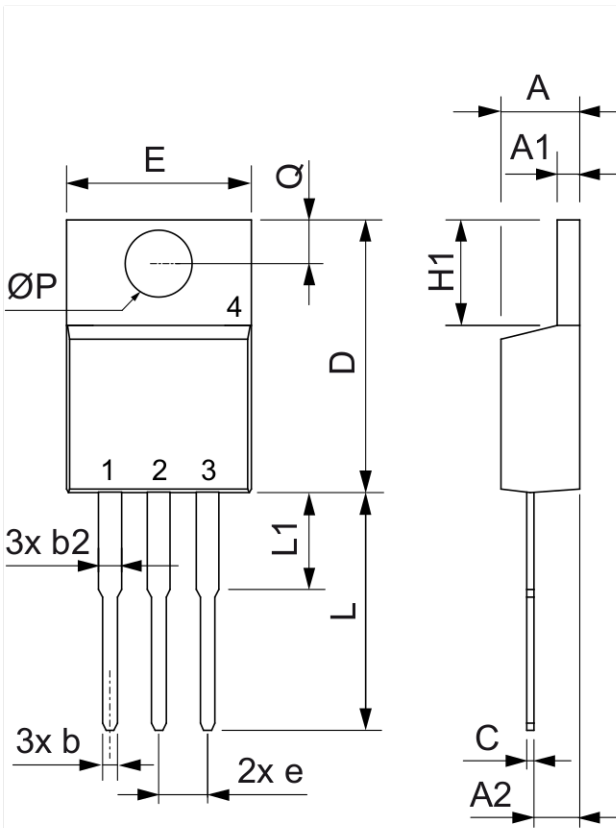

Dim.	Millimeter		Inches	
	Min.	Max.	Min.	Max.
A	4.32	4.82	0.170	0.190
A1	1.14	1.39	0.045	0.055
A2	2.29	2.79	0.090	0.110
b	0.64	1.01	0.025	0.040
b2	1.15	1.65	0.045	0.065
C	0.35	0.56	0.014	0.022
D	14.73	16.00	0.580	0.630
E	9.91	10.66	0.390	0.420
e	2.54	BSC	0.100	BSC
H1	5.85	6.85	0.230	0.270
L	12.70	13.97	0.500	0.550
L1	2.79	5.84	0.110	0.230
$\varnothing P$	3.54	4.08	0.139	0.161
Q	2.54	3.18	0.100	0.125

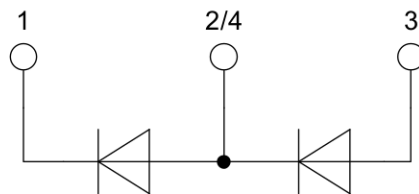

Rectifier

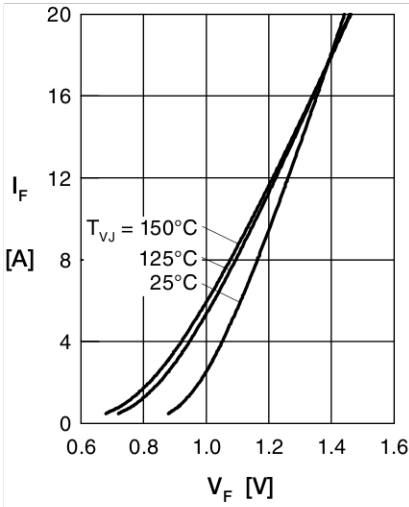


Fig. 1 Forward current versus voltage drop per diode

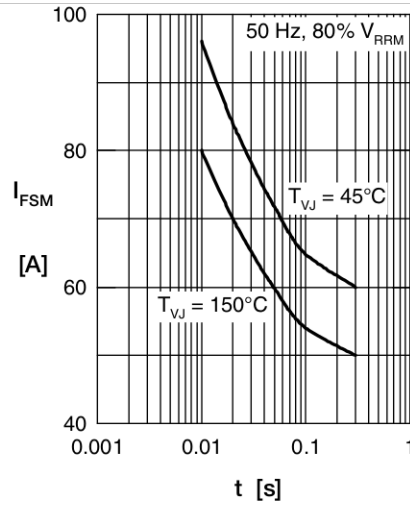


Fig. 2 Surge overload current

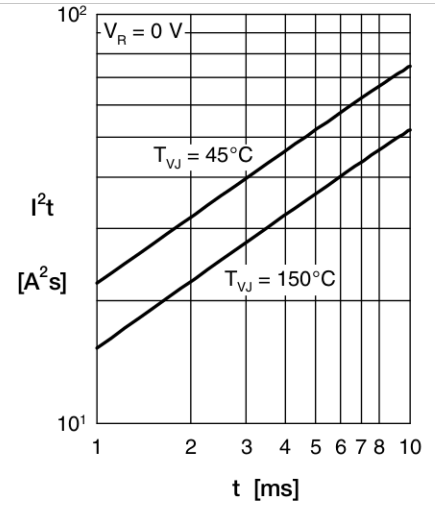


Fig. 3 I^2t versus time per diode

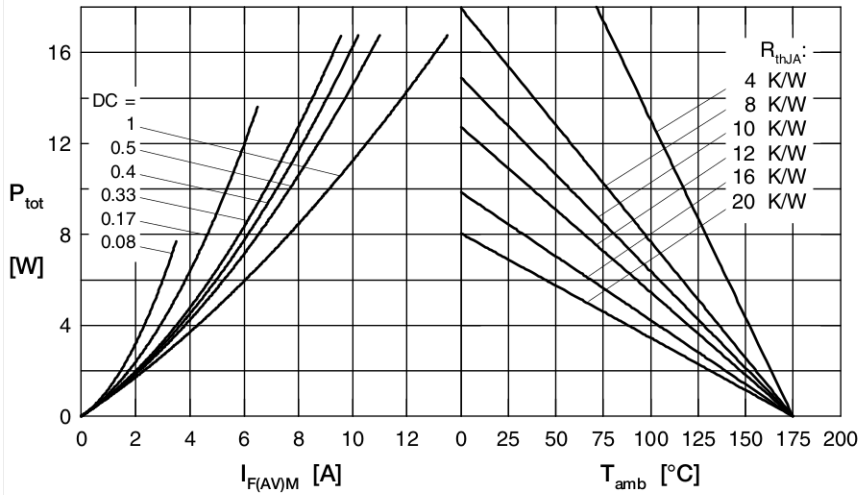


Fig. 4 Power dissipation vs. direct output current and ambient temperature

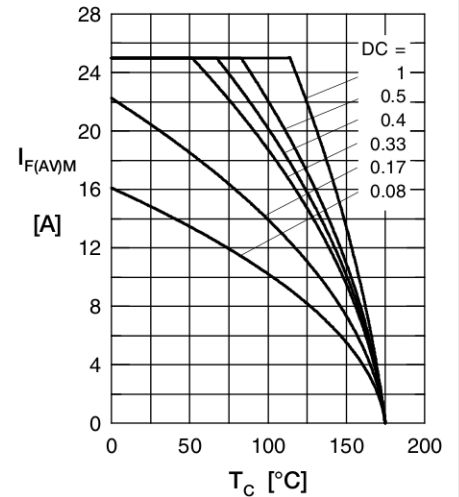


Fig. 5 Max. forward current vs. case temperature

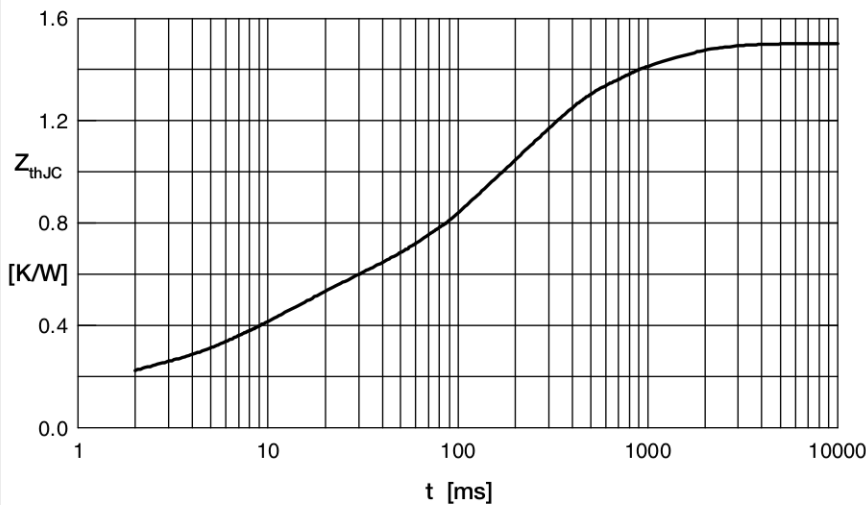


Fig. 6 Transient thermal impedance junction to case

Constants for Z_{thJC} calculation:

i	R_{thi} (K/W)	t_i (s)
1	0.155	0.0005
2	0.332	0.0095
3	0.713	0.17
4	0.3	0.8
5	0.00001	0.00001