


POINT1 : Styling Brush 、 Plastic Model

用途：整髮器、模型



DIRECTION OF ROTATION

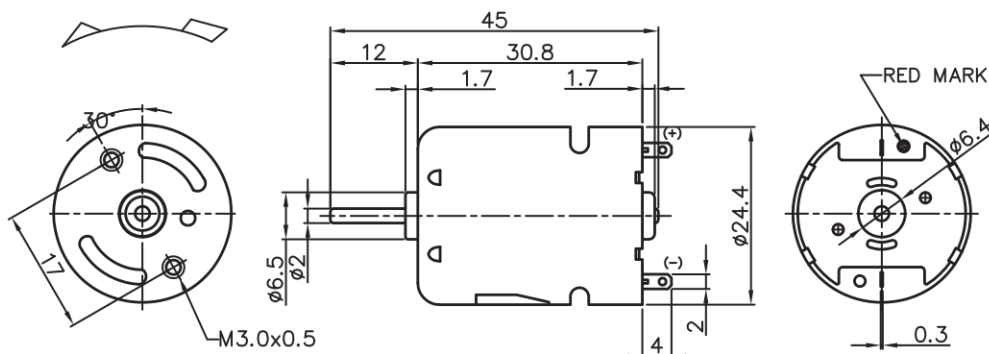

WEIGHT : 51g (APPROX)

MODEL	VOLTAGE		NO LOAD		AT MAXIMUM EFFICIENCY						STALL		
	OPERATING RANGE	NOMNAL	SPEED	CURRENT	SPEED	CURRENT	TORQUE		OUTPUT	EFF	CURRENT	TORQUE	
			rpm	A	rpm	A	g-cm	mN-m	W	%	A	g-cm	mN-m
370S-2870P	4.5 – 9.6	7.2V CONSTANT	16000	0.48	12706	2.27	82	8.08	10.75	67	10.40	461	45.20
370S-4530P	3.0 – 6.0	6.0V CONSTANT	29000	0.80	24000	5.50	78	7.65	19.42	59	29.15	539	52.84
370S-16235P	12.0 – 24.0	15.0V CONSTANT	9700	0.10	7500	0.52	62	6.08	4.90	62	2.64	336	32.94
370S-5028P	2.4 – 3.6	3.6V CONSTANT	19000	1.00	16200	5.77	82	8.04	13.78	66	27.99	476	46.67

馬達的出軸長度及性能參數，EMC 對策可依客人要求做調整，詳情可詢問相關業務人員。
Please inquire your sales representative for output performance and EMC solution

